SCOPE OF WORK

Castle View - Echo Valley Ranch Project +/- 143 acres

1. General Information

Project Location: The **Castle View – Echo Valley Ranch** project lies along the Front Range of the Rocky Mountains located in Park County, Colorado. The project is approximately 9 miles southeast of Bailey, Colorado and is reached by driving south on Wellington Lake Rd. from Bailey. Follow Wellington Lake Road and then turn into Echo Valley Road. The project area is +/-143 acres.

Operational Period:

The operational period may commence as soon as the contract is executed, the plan of operations is approved, and the performance guarantee and damage deposit are received by CSFS. The project must be completed by December 15th, 2026, or an earlier agreed-upon date outlined in the plan of operations.

Purpose:

Treatment Goals: The goals of this project are to treat +/-143 acres reducing wildfire risk and improving forest health and wildlife habitat.

Treatment Objectives: There are multiple objectives that the **Contractor** will implement to reach the desired goals. The objectives listed below are general and more detailed in the prescription below:

- Thin mixed-conifer and ponderosa stands to reduce fuel loading, alter the vertical and horizontal arrangement of fuels, create a mosaic of stand structures across the project area, and enhance species diversity in the understory
- Remove dead, diseased, and poor-form trees before healthy trees
- Promote fire and climate adapted tree species such as ponderosa pine and quaking aspen while removing decadent lodgepole pine and understory/intermediate Douglas-fir, lodgepole pine, and other species where appropriate

Treatment Unit	Acres
1	+/-32
2	+/-62
3	+/-49

2. Control of Operations

Under this contract, "**Contractor's** Operations" shall include activities or use of equipment by the **Contractor**, **Contractor's** employees, agents, sub-contractors, or sub-contractor's employees or agents; during their employment on the Castle View – Echo Valley Ranch Project. A Colorado State Forest Service (CSFS) representative—herein referred to as the Administrator—will supervise the **Contractor**'s operations in accordance with the executed Statement of Work/Operating Plan. The **Contractor** shall conduct operations in a professional, timely, and orderly manner. The timing of the Administrator's on-the-groundwork designation and other work shall not cause unnecessary delay to the **Contractor**.

Administration of Project:

Maegan Aldous
Forester – Golden Field Office
Colorado State Forest Service
(303) 279-9757 ext. 309
1504 Quaker Street
Golden, CO 80401
maegan.aldous@colostate.edu

3. General Description of Work

Complete all treatments through either mechanical or hand felling. Remove logs from the project site according to the operational standards outlined below. Remove slash from the project site or masticate in the treatment units according to the operational standards outlined below. The prescriptions described below will guide work within the treatment units.

Access: The project area is accessible via County Road 70 as well as semi-improved dirt roads going through property. Semi-improved dirt roads are maintained year-round by the landowners.

Unit Descriptions: There is one management unit broken up into various treatment units comprised primarily of ponderosa pine (PP), Douglas-fir (DF), lodgepole pine (LP), aspen (AS), and rocky mountain juniper (RM). Vegetation type differs depending on the slope and aspect throughout the project area. PP is most dominant on south to west facing slopes where DF/LP mixed conifer is most dominant on north to east facing slopes.

- Blue Treatment Unit (TU 1):
    - PP dominant and dense in the overstory, midstory, and understory. Basal areas range from 40 ft^2/ac - 200 ft^2/ac with most trees ranging from 6-16 inches in diameter at breast height (DBH) and many suppressed medium sized stems interspersed between larger stems.
    - Slopes within the treatment area range from 0-40% with an average of 30%.

- Pink Treatment Unit (TU 2):
    - Mixed conifer that consists of PP, LP, and DF depending on the slope's aspect. Northern aspects are more LP and DF dominant where southern aspects are PP dominant. Basal area ranges from 60 ft^2/ac – 220 ft^2/ac with most trees ranging from 8-16 inches in diameter at breast height (DBH).
    - Slopes within the treatment area range from 0-40% with an average of 25%.
- Orange Treatment Unit (TU 3):
    - Mostly PP dominant with DF and LP mixed in and scattered AS and RM. Basal areas range from 50 ft^2/ac to 180 ft^2/ac with most trees ranging from 8-14 inches in diameter at breast height (DBH) with both larger and smaller stems throughout.
    - **S**lopes within the treatment area range from 0-40% with an average of 25%.

Desired Equipment: CSFS has listed the type of equipment needed to meet the prescription specifications. It is not the only equipment allowed, and not all listed equipment is required. **Contractor** will outline the proposed equipment for this project in the plan of operations.

- Rubber Tired/Tracked Feller-Buncher / Rubber Tired/Tracked Harvester
- Rubber Tired/Tracked Forwarder / Rubber Tired/Tracked Grapple or Cable Skidder
- Rubber Tired/Tracked Masticator
- Processor
- Log Loader
- Chainsaws

4. Project Implementation

Treatment Unit Prescriptions:

TU	Acres	Prescription
1 (Blue Flagged)	32 +/- ac	• Remove all LP, RM • Remove all trees marked with blue paint. • Remove all trees less than 5" not flagged with red/white flagging • Retain any tree flagged with red/white candy cane flagging • Remove all standing dead (not flagged with red/white flagging) and dead and down greater than 60% sound • Process logs in woods and masticate slash
2 (Pink Flagged)	62 +/- ac	• Remove all LP, RM • Remove all trees marked with blue paint. • Remove all trees less than 5" not flagged with red/white flagging • Leave any tree flagged with red/white candy cane flagging or any trees surrounded by flagging • Remove all dead standing (not flagged with red/white flagging) and dead and down greater than 60% sound • Process logs in woods and masticate slash

3 (Orange Flagged)	49 +/- ac	• Remove all LP, RM • Remove all trees marked with blue paint. • Remove all trees less than 5" not flagged with red/white flagging • Leave any tree flagged with red/white candy cane flagging or any trees surrounded by flagging • Remove all dead standing (not flagged with red/white flagging) and dead and down greater than 60% sound • Process logs in woods and masticate slash
TOTAL	143 +/- ac	

Marking: The chart above depicts the marking colors and types used to layout the project.

- The **Contractor** will remove all trees marked with blue paint in all units.
- The **Contractor** will retain all trees designated by red and white striped flagging.
- The **Contractor** will cut and process logs within treatment unit boundaries.
- The **Contractor** will masticate all slash and non-merchantable material within the treatment boundaries.

Forest Product Merchantability Specifications:

To meet the merchantability specifications, the product must contain all the following specifications:

- Ponderosa pine, Colorado blue spruce, Douglas-fir, or lodgepole pine
- 8-foot piece with a small end diameter greater than or equal to 5 inches
- Containing at least 60% sound/merchantable wood (able to grab and skid)

Product Utilization: Contractor must process all harvested trees to the following specifications:

- Limb all merchantable trees and cut to a 5-inch top.
- Sort processed logs and deck by log length to prepare for hauling.
- Remove all processed logs prior to project end date and final contract payment.

Harvest Method / Prescription Specifications:
Treat trees designated for removal according to the product utilization specifications below:

- The **Contractor** will fell and process tree within the treatment boundaries and remove logs from the project site.
- The **Contractor** will masticate slash and tops within the treatment unit boundaries.
- The **Contractor** will **NOT** pile slash, tops, and non-merchantable material from the project area.
- Skid or forward logs to a designated landing predetermined by the Administrator and mutually agreed upon with the **Contractor** to sort and prepare for hauling.
- Skid logs to the closest landing unless approved by the Administrator.

- Skid all dead/down/recently blown over trees, further referred to as 'gray wood', meeting the merchantability specifications listed in section: 4. Project Implementation, Forest Product Merchantability Specifications to predetermined landing locations for processing and sorting. The **Contractor** will discuss questionable dead/down/recently blown over trees for removal with the Administrator. Treat all gray wood that does not meet merchantability specifications as slash.
- **Contractor** will completely avoid areas not containing any trees for removal under the prescription.
- The **Contractor** will cut stumps as low as possible but where slope, rocks, or other features prohibit cutting to ground level. The **Contractor** must cut stumps no higher than 4" on the uphill side.
- Leave and protect any trees that do not meet the above designation for removal as residual trees to achieve the desired treatment standards.
- **Contractor** must remove the product by the deadline. If product is not removed, the Administrator will not consider the project finished and the **Contractor** will not receive payment for that portion of the project. **Contractor** will also forfeit the Performance Guarantee due to project incompletion.

Mastication guidelines:

- Within treatment unit boundaries, the **Contractor** will masticate slash, tops, and trees that meet prescription specifications and are less than 5 inches diameter at breast height. Some fine slash will need to be retained for use on skid trails.
- All areas where mastication has occurred will have a maximum chip depth of 3 inches at any one location and a maximum chunk size of 4 foot in length and 4 inches in diameter. Distribute masticated materials evenly throughout the treatment units. The **Contractor** must process trees in treatment unit boundaries and masticate slash within the unit boundaries.
- If removal/mastication of downed woody material is not possible without damaging healthy and robust aspen regeneration, leave the downed stems on site.
- Do not deposit mastication by-products on established roads or skid trails. Masticate all slash that is not on skid trails.

Lop and Scatter guidelines:

- Confine lop and scatter to areas within the treatment unit that are located on slopes greater than 40%, areas where rocks compose greater than 40% percent of the ground cover, or the Administrator approves the **Contractor**'s request to use lop and scatter.
- Use lop and scatter in areas within the treatment unit where the quantity of slash is minimal.
- Distribute cut slash to a maximum allowable height less than or equal to 12 inches.
- Do not pile slash underneath or within 10 ft of the dripline of a residual tree.

5. Operational Standards

Contract and Operational Period:

- The operational period begins on the date agreed upon by the **Contractor** and the Administrator and ends December 15, 2026.
- Target start date is as soon as possible after contract execution. The **Contractor** and the Administrator will determine an agreed upon target start date. Work must commence no later than 30 days after this date.
- For each day past this 30-day window, the Administrator **will** assess the **Contractor** $250 fine per day and deduct it from the damage deposit.
    - The **Contractor** must identify the proposed start date in the plan of operations and the Administrator must agree.
- The **Contractor** may work 7 days a week, Monday through Sunday, excluding federal holidays. Work is not permitted on federal holidays. Work periods are from 7:00 AM to sunset. Additional restrictions may be temporarily in place based on the discretion of the Administrator. The Administrator is typically available Monday-Thursday, so plan coordination accordingly. Any issues/questions arising over the weekend may have to wait until the following Monday for resolution.
    - If the **Contractor** needs to extend the project end date, the Administrator and landowner must approve the request ***at least 60 days*** before the project end date.

Skid Trails:

- The **Contractor** must apply fine slash material (unmasticated) less than 3" in diameter to skid trails for erosion control. The **Contractor** cannot masticate on skid trails. Compact this slash with heavy equipment. The **Contractor** must cover at least 75% of the skid trail surface with slash material, slope dependent for erosion control (to the Administrator's discretion).
- The Administrator has the authority to suspend operations if current conditions (muddy/snowy conditions, too wet, too steep, etc.) make excessive damage to roads and skid trails unavoidable.
- The **Contractor** must repair ruts and/or depressions in the soil caused by project equipment greater than 6 inches deep. At the **Contractor's** expense, the **Contractor** must rehabilitate skid trails and other rutting at the sole discretion of the Administrator and may include installing water bars according to the Colorado BMP Manual (https://csfs.colostate.edu/wp-content/uploads/2024/01/BMP_WaterQuality_2023_Web_CMP.pdf). Reseeding with NRCS approved weed-free native grass mix, or any other method as determined.

Landings:

- The CSFS has identified potential landings on the attached treatment unit map. The Administrator must approve modifications to existing landings or desirable additional landing locations, not identified on the map. Landings will require rehabilitation at the **Contractor's** expense after product removal and determined at the sole discretion of the Administrator to facilitate recovery. This may include but is not limited to:
    - Ripping the area within the landing
    - Reseeding the landing with the Natural Resources Conservation Service (NRCS) approved weed-free native grass seed mix
    - Spread a seed barrier or appropriate level of slash and/or masticated material over freshly applied grass seed to prevent the removal of grass seed by erosion, wind, or other biological agents
    - In addition, the Administrator may require **Contractor** to install trackout control mats before driving log trucks onto roadway from the landing
    - **Contractor** must remove all non-merchantable material left at the landings following wood utilization from the property and/or move back into fuels treatment areas and masticate or pile.

Protection of Property:

- The **Contractor** must conduct all operations in a timely manner and in accordance with the approved Plan of Operations and take all necessary precautions to protect the remaining forest stand, soils, and any improvements.
- At the **Contractor's** expense, the **Contractor** must repair any man-made resources altered by the project to the pre-work condition or better before the end of the contract and final payment. The Administrator may also assess penalties for damage to soils, riparian areas, other resources of the forest, roads, or other improvements. Determination of damage is at the sole discretion of the Administrator.
- The **Contractor** must remove any exposed root balls created during this project.
- The **Contractor** must minimize soil disturbance. The Administrator may suspend or limit operations in cases of extreme fire danger (i.e. red flag warning), excessive soil rutting, damage from muddy/snowy conditions, excessive residual tree damage, road damage, or failure to meet contract specifications.
- **Roads and 4-Wheel Drive Trails:** The CSFS has identified and mapped the primary unimproved access roads throughout the project area using a combination of GPS units and mapping software. Attached, as Exhibit A: Maps, is a road map depicting unimproved roads throughout the project area.
    - Main access into the properties must remain passable at all times.
    - The **Contractor** will remove all large material deposited on any roads or trails that may impact regular use immediately.

- All road construction must adhere to the standard road construction guidelines, found in the 2023 Colorado Forestry Best Management Practices to Protect Water Quality in Colorado, available on the CSFS website (https://csfs.colostate.edu/wp-content/uploads/2024/01/BMP_WaterQuality_2023_Web_CMP.pdf).
- The **Contractor** is responsible for adhering to any permitting processes required for completion of this project within the county the project is occurring.
- If at any time a road becomes impassable due to damage or blockage from operations, the **Contractor** must notify the Administrator immediately and make the road passable within 24 hours. Within 48 hours, the **Contractor** must repair the damaged road, at the expense of the **Contractor,** to a like or better condition than before the damage occurred.
- The **Contractor** must repair any road/trail altered from its current condition to a like or better condition. Repair may include but not limited to; re-grading drainage ditches/cutbacks, refilling or re-grading road base, installing water bars or dips, or repairing damaged pavement. The Administrator will inspect all roads/trails to ensure working conditions prior to final acceptance and completion of the project. Repairs are at the expense of the **Contractor.** If repairs are not complete or are not in like or better condition by the contract end date then CSFS reserves the right to retain the damage deposit to correct any deficiencies. Determination of damage is at the sole discretion of the Administrator.

- **Fences:** Do not damage external property boundary fences or propel debris onto the neighboring lands. Leave no woody material on or piled against boundary fences. Contract may require handwork near external property boundaries in order to meet this standard. The **Contractor** will fix any intentional or unintentional damage to fences resulting from project operations at their expense to previous or better condition with final approval at the discretion of the Administrator. **Contractor** may take down fences temporarily when necessary to allow for access but must return to the previous condition before project completion. An attached map shows where most existing fences occur.
- **Utility Lines:** Multiple above ground and underground utility lines exist within the treatment area. The **Contractor** is responsible to ensure operations do not damage or interfere with any utility lines during the completion of the project. The **Contractor** must call 911 immediately and notify the utility company and Administrator if such damage should occur, work with the utility company to repair and restore any interrupted power service and fix or pay for any damages. The attached map shows where a power line goes through TU 1.
- **Operation Hazards and Inherent Dangers:**
  - The **Contractor** is responsible for mitigating inherent risks. This list is not exhaustive and additional inherent risks could exist that are not identified here. Physical hazards could exist on or near the property and might not appear

obvious such as dead trees, mining remnants including holes and structures, barbed wire fencing, vehicle traffic, blind curves, pedestrians, bikers, outbuildings, onlookers, overhead power lines, etc.

- The attached map shows three locations where hazards exist. The **Contractor** will avoid these areas during operation. TU 2 contains an old mining pit in the northern section and an extremely rocky area in the southern section. TU 3 contains an old mountain biking jump. Avoid all hazards by going around them on either side.
- It is the **Contractor 's** responsibility to mitigate all inherent risks, assess site conditions and operate safely at all times.

- **Best Management Practices:** The **Contractor** must follow the State of Colorado Best Management Practices (BMP's) within all treatment units for soil and water quality protection. Please refer to the CSFS publication: 2023 Colorado Forestry Best Management Practices to Protect Water Quality in Colorado (BMPs), available on the CSFS website (https://csfs.colostate.edu/wp-content/uploads/2024/01/BMP_WaterQuality_2023_Web_CMP.pdf). If at any time the **Contractor** is failing to follow the BMPs or is not meeting the BMPs, the Administrator may shut down the project and require the **Contractor** to fix any problems at their expense.
  - To reduce erosion and impact to roads, the Administrator at their discretion may require the **Contractor** to utilize wattles, tracking control, silt fences, weed-free wood straw, or other erosion control devices and/or techniques.
- **Protection of Residual Trees:** The **Contractor**'s operations must not excessively damage reserve trees. The Administrator will charge the **Contractor** $50 per damaged tree (greater than 8" DBH) if the damage is considered more excessive than necessary to complete the project. The Administrator may require the **Contractor** to treat trees with significant damage from the operation to prescription (examples: broken top, multiple equipment scars, scarring in excess of 12" x 6", or greater than 1/3 trunk circumference, etc.).
- **Leave Trees:** The **Contractor** must not damage any trees within areas marked as Leave Trees with white/red diagonal stripe (candy cane) flagging.
- **Weed Prevention/Rehabilitation/Reclamation**: The **Contractor** must take the following steps to prevent the introduction of noxious weeds from outside the treatment area and to prevent the future spread of noxious weeds within the treatment area:
  - Wash the undercarriage, tires, and all other areas not clear of dirt and vegetation off all trucks and equipment offsite before entering the project area to reduce the spread of noxious weeds from other projects.
  - The Administrator must have 3 days' notice, excluding weekends and Federal holidays, to inspect and approve vehicles and machinery. This must be completed before the **Contractor** may move equipment into the project area.

- The Administrator and the **Contractor** will determine and mutually agree upon vehicle and machinery inspection locations.
- Avoid areas with excessive amounts of noxious weeds and wash any equipment that drives through excessive amounts of noxious weeds before moving it into another treatment unit.
- The **Contractor** will complete reseeding at their expense on skid trails, landings, and any other disturbed areas as determined by the Administrator to rehabilitate excessive amounts of exposed, bare soil from equipment operations under this contract. The Administrator will determine areas of excessive bare soil using the following:
  - Bare soil is exposed on more than 10% of any 1 acre and/or
  - Bare soil is exposed in one continuous area exceeding 500 square feet.
- The **Contractor** must use an NRCS approved weed-free native grass mix for this contract. The Administrator must approve mix before application within project site.

- **Hazardous Materials:** The **Contractor** must take all reasonable precautions to prevent pollution of air, soil, and water by the project's operations. The **Contractor** must notify the Administrator immediately of any fuel, hydraulic fluid, or other chemical spills caused by their employees, agents, contractors, or subcontractors directly or indirectly resulting from the project's operations. Remove any soil contaminated by loss of fuel, oil, grease, hydraulic fluid, coolant, or other fluids and place in covered drums or other acceptable containers for proper disposal by the **Contractor**. The **Contractor** may place temporary fuel cells for contract use at staging areas in coordination with the Administrator. The **Contractor** must place all temporary fuel cells within a spill berm. The **Contractor** will provide details outlining mitigation and course of action in the Spill Plan section as a part of the Plan of Operations. CSFS recommends the **Contractor** always have a hazardous materials cleanup kit available during all operations.
- **Refueling:** The Administrator will designate areas for refueling of equipment. Refueling areas with a minimum dimension of 5 by 5 feet and the **Contractor** must clear off all combustible material to bare mineral soil. Start no chainsaw or other motorized equipment within 15 feet of any refueling area. The **Contractor** must cool chainsaws or other equipment for a minimum of 10 minutes before refueling.
- **Snow Removal/Movement:** If the **Contractor** needs to access the site during periods of accumulated snow or during snow fall, they are responsible for conducting snow removal/movement in any areas not already done by the landowners. The **Contractor** will conduct snow removal/movement in a manner that will not damage the existing road system and infrastructure.
- **Fire Precautions and Control:** The **Contractor** must take all necessary precautionary measures to prevent a fire resulting from the project's operations. The **Contractor** must, both independently and in cooperation with the local fire protection district, take all

reasonable and practical action to suppress fires resulting from the project's operations and notify the Administrator immediately should a fire occur. The **Contractor**'s independent initial fire suppression action on such fires must be immediate and include use of all necessary personnel and equipment at their disposal in the project area.

- Smoking is only allowed in vehicles.
- All vehicles and motorized equipment must utilize effective manufacturer-certified spark arresters and muffler systems.
- Each vehicle must have a Class A 10lb fire extinguisher and a minimum of 1 fire tool maintained in serviceable condition per crew member.
- The Administrator may suspend or limit any or all of the **Contractor's** operations in cases of extreme fire danger (i.e. red flag warning).

Additional Performance Standards:

- In order to quickly request assistance in the event of a fire or medical emergency, each crew member working on the site is required to have immediate access to a cellular phone. Crew may need to travel to get cellular coverage.
  - In the event of a fire, the **Contractor** will call the appropriate personnel in the following order:
    - 911
    - Administrator
- The **Contractor** must direct all communication concerning this project to the Administrator. The **Contractor** should refer all issues and concerns raised by landowners, adjacent property owners, and/or others to the Administrator.
- The **Contractor** will not leave trash or litter anywhere on the property, access route, or vicinity. The **Contractor** must haul any trash generated by the project daily. The Administrator may fine the **Contractor** $50 per instance of trash/litter discovered on site.
- The **Contractor** is *strictly prohibited* from camping on the property.
- The **Contractor** will not hunt or the discharge of any weapons during the operation period.
- The **Contractor** is required to clean all equipment and vehicles and ensure they are in proper working order before commencing work.
- The **Contractor** must provide appropriate safety signage for the project.
- The **Contractor** must conduct forest operations, so they don't jeopardize the continued existence of federally listed species or destroy or adversely modify designated critical habitat. If federally listed species under the Endangered Species Act are discovered in or near the project area, the **Contractor** must notify the Administrator who may suspend or terminate forest operations.
- If the **Contractor** or crew discover unidentified cultural resources during project activities, work must halt until the Administrator evaluates the resources in terms of

Federal Register criteria, 36 CFR 60.4, in consultation with the Colorado Historical Society.

- The **Contractor** will leave the work site in a safe manner at the end of every work day with equipment properly and safely stored and ignition keys removed from machinery. Safely park all vehicles and equipment left on site on level ground with wheels chocked. Leave no partially cut or hung up trees at the end of the work day.
- The **Contractor** must notify and receive approval from the Administrator before removing equipment from project site.
- The CSFS requires that **Contractor** use Avenza Maps or a like program that can utilize georeferenced PDF maps. Georeferenced PDF maps identify where the forest management activities are currently taking place, and locates specific treatment units, and project and property boundaries.

6. Inspections

The Administrator shall make periodic inspections. The CSFS encourages the **Contractor** and/or their representative to observe the inspection process. CSFS will provide the **Contractor** with inspection summaries upon request. The Administrator expects the **Contractor** to achieve 95+% performance level for contract items.

7. Plan of Operations

After contract execution, the **Contractor** and the Administrator must finalize and agree to a written plan of operations as provided in the vendor solicitation response. The plan must describe projected start and end dates for the project as well as anticipated equipment and personnel. This plan will also include contingencies for fire, safety, spill, and quality control. The **Contractor** must start work within 30 working days of the date agreed upon in the Operational Plan or as soon as possible after the contract execution. For each day past this 30-day window, the Administrator **will** assess the **Contractor** $250 fine per day and deduct it from the damage deposit. The Administrator must agree to a delay in the start date due to weather and conditions that prevents access to the work sites. **No work on the start date will begin without the presence of the Administrator.** The **Contractor** must request a final project closeout inspection by the Administrator; otherwise, the final inspection will occur on the last day of the contract period.

The **Contractor** must list any sub-contractors proposed as a part of this project in the bid and specifically list which activities assigned to them and their proposed equipment in the plan of operations. The CSFS must approve all subcontractors in writing prior to bid approval and contract execution. The CSFS will hold sub-contractors to the same standards and requirements as the **Contractor** as defined and specified in this document including insurance requirements. The **Contractor** is responsible for management of any/all sub-contractors.


8. Damage Deposit and Performance Guarantee:

A damage deposit in the amount of $10,000 is required as part of this project. The **Contractor** shall pay a cash deposit at the CSFS State Office or certified check at the Field office. The CSFS may use the deposit to cover expenses incurred by the Colorado State Forest Service to correct deficiencies in work and/or damage not repaired or corrected by the **Contractor** to soils, road maintenance, slash disposal, and damage to trees as outlined in the scope of work. CSFS shall deduct any charges for damages to soils, improvements or other elements of the forest stand not repaired or corrected by the **Contractor** from the Damage Deposit. In the event any balance of the damage deposit falls below $500, the **Contractor** shall restore the damage deposit to the original amount before work under the contract may proceed.


The **Contractor** shall pay $5,000 as a **Performance Guarantee** upon signing of this contract. The **Contractor** shall pay a cash deposit at the CSFS State Office, a certified check at the Field office, certified bond from a qualified bonding company, or acceptable Letter of Credit. The CSU Legal Department must preapprove all Letters of Credit in advance. The CSFS shall use the performance guarantee in part or in full, for non-performance of any of the terms or conditions of this Independent Services Contract and/or to correct deficiency in any work not completed to contract specifications. The Colorado State Forest Service may use the guarantee to cover expenses incurred to complete contract obligations, including re-bidding the entire project if necessary.

The CSFS may hold the damage deposit or performance guarantee one year beyond the ending date of the Contract or any extension executed hereunder. This is to ensure that the Contract Administrator(s) can complete a final closeout inspection and properly assess any damages. CSFS will release any remaining balances to **Contractor** promptly upon satisfactory completion of this contract.

Exhibit A: Maps

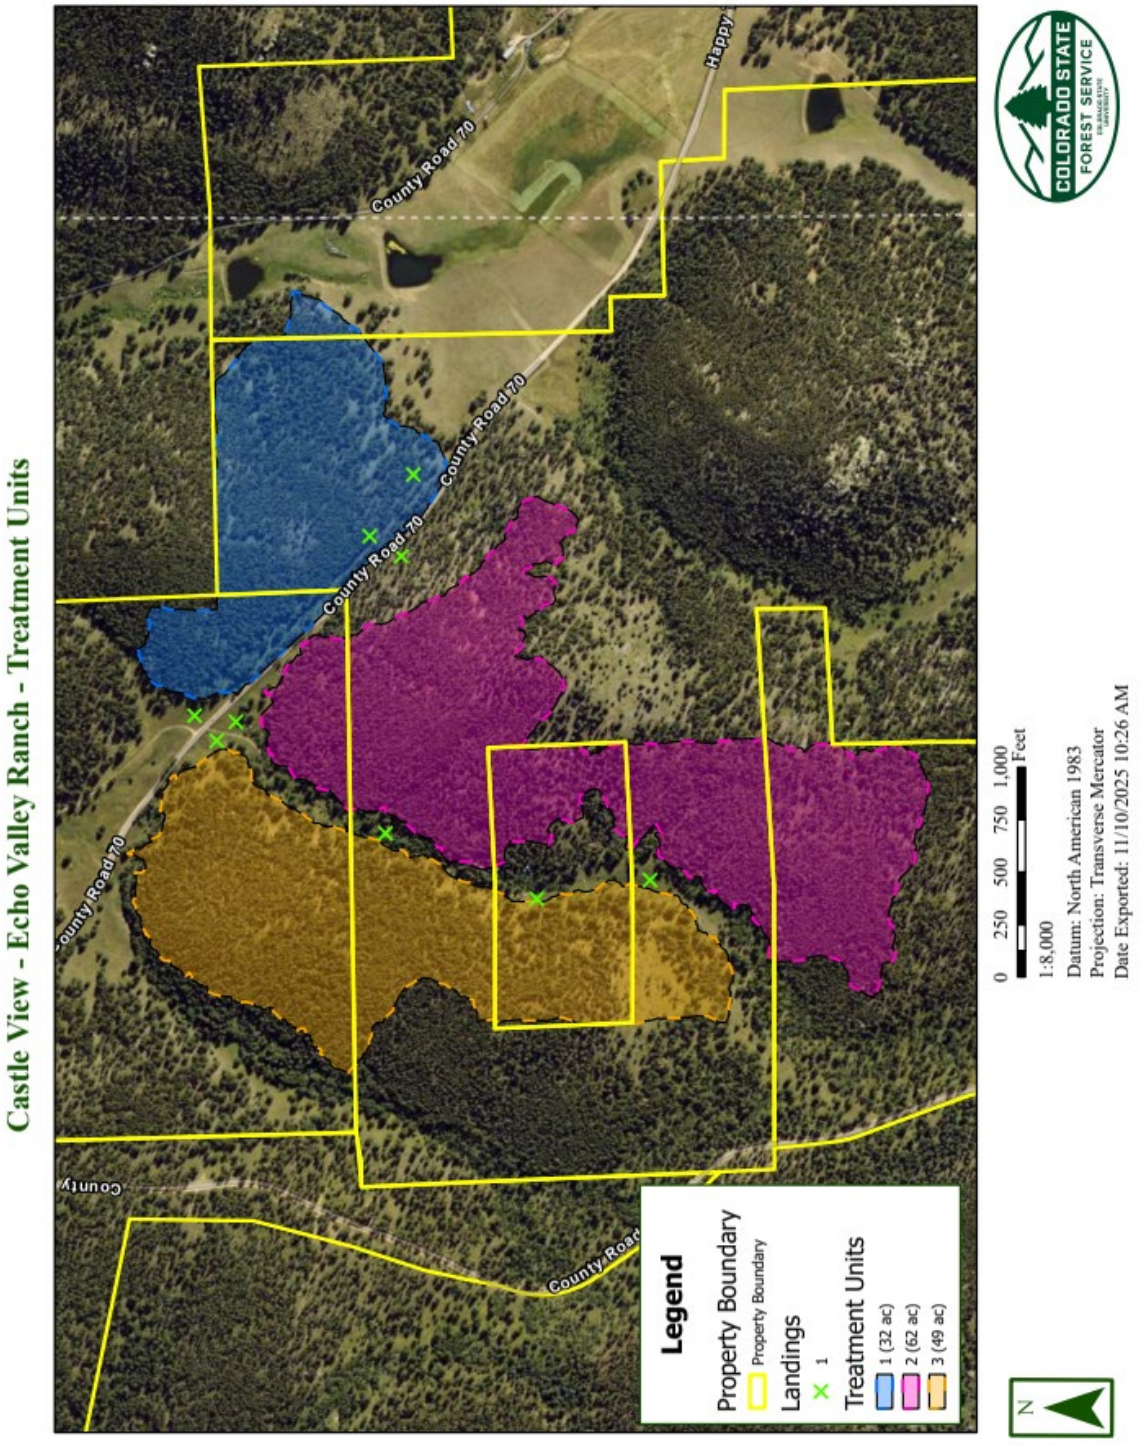

Castle View - Echo Valley Ranch - TUs with Contours

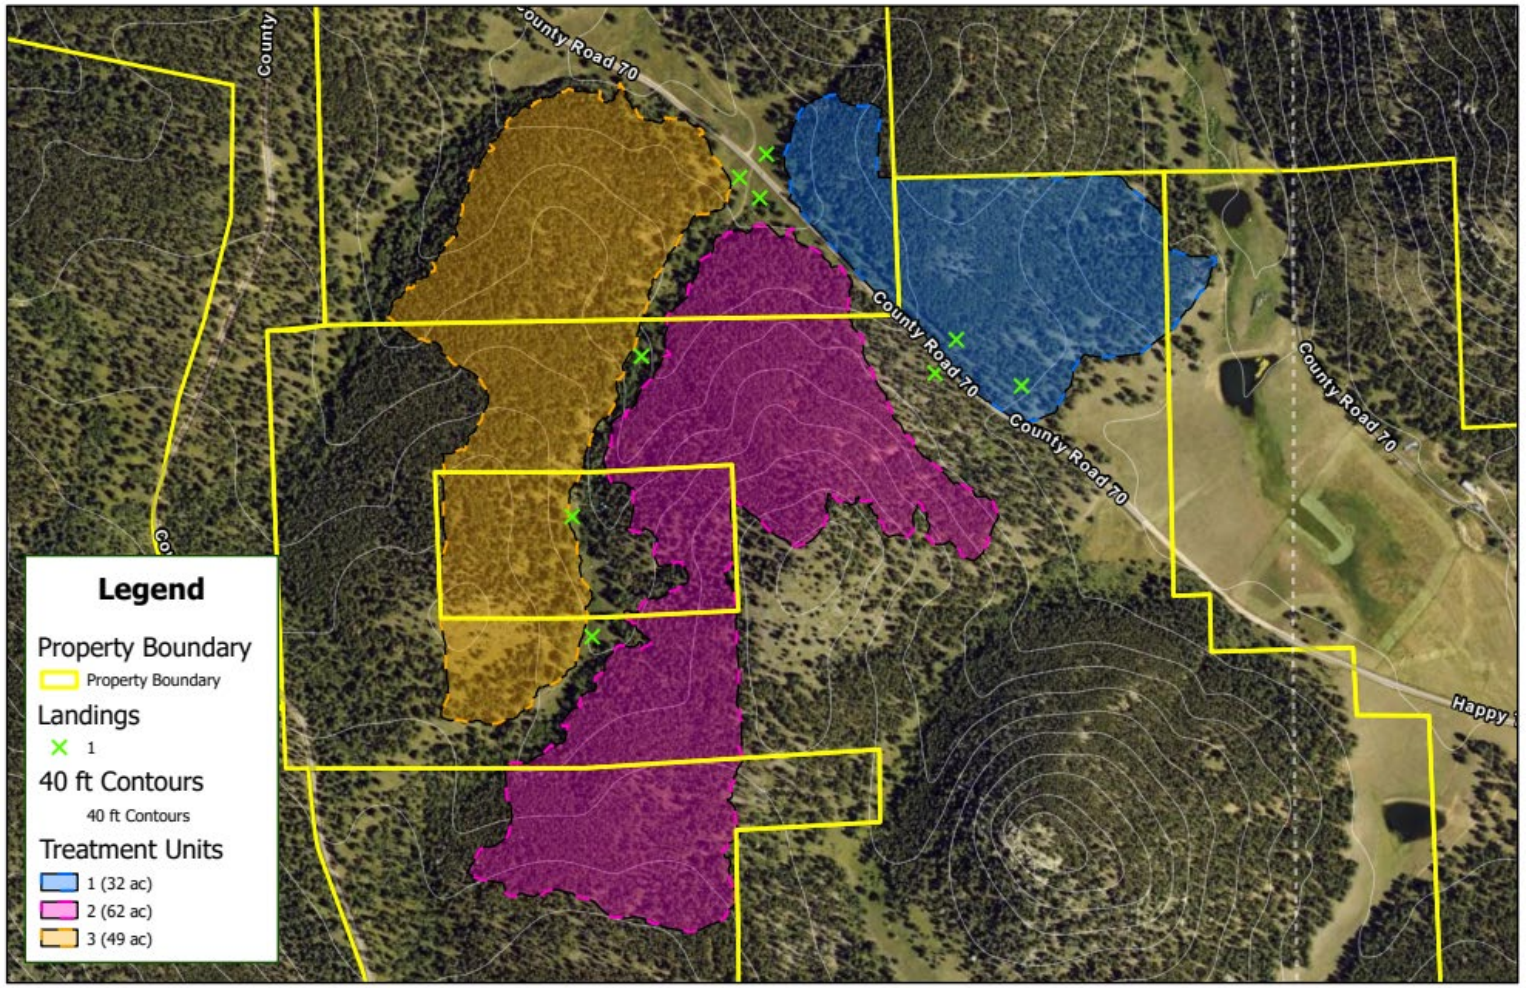

N


0 250 500 750 1,000 Feet

1:8,000

Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:36 AM

COLORADO STATE FOREST SERVICE

Castle View - Echo Valley Ranch - Slope % with Contour

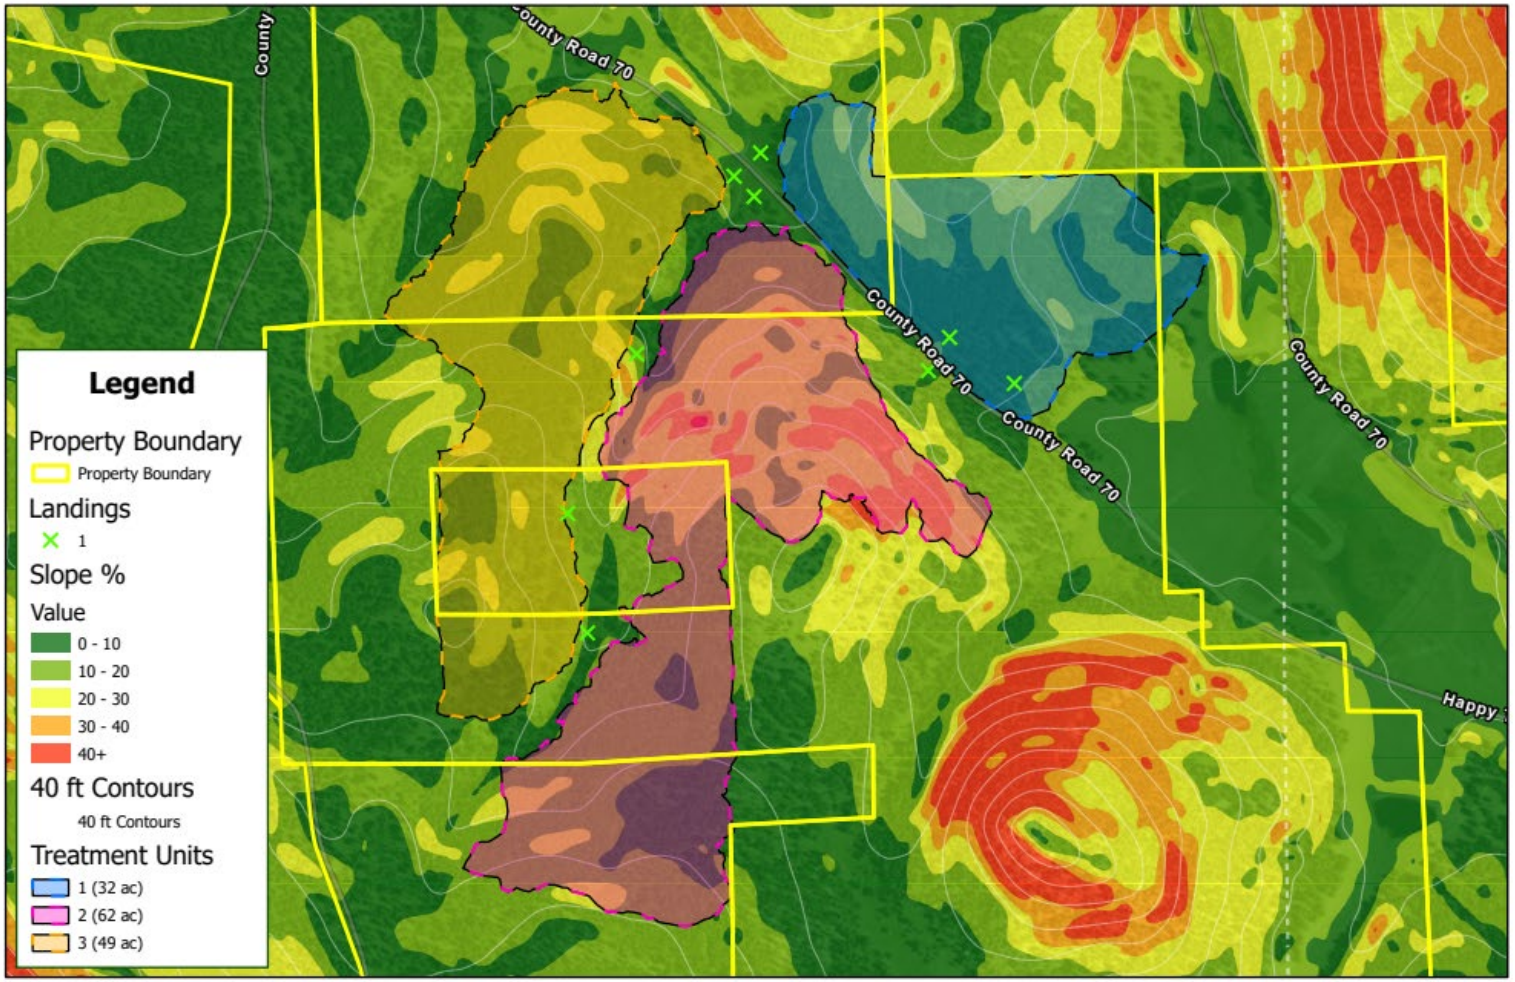

N


0 250 500 750 1,000 Feet

1:8,000

Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:40 AM

COLORADO STATE FOREST SERVICE

Castle View - Echo Valley Ranch - Roads, Fences, and Hazards

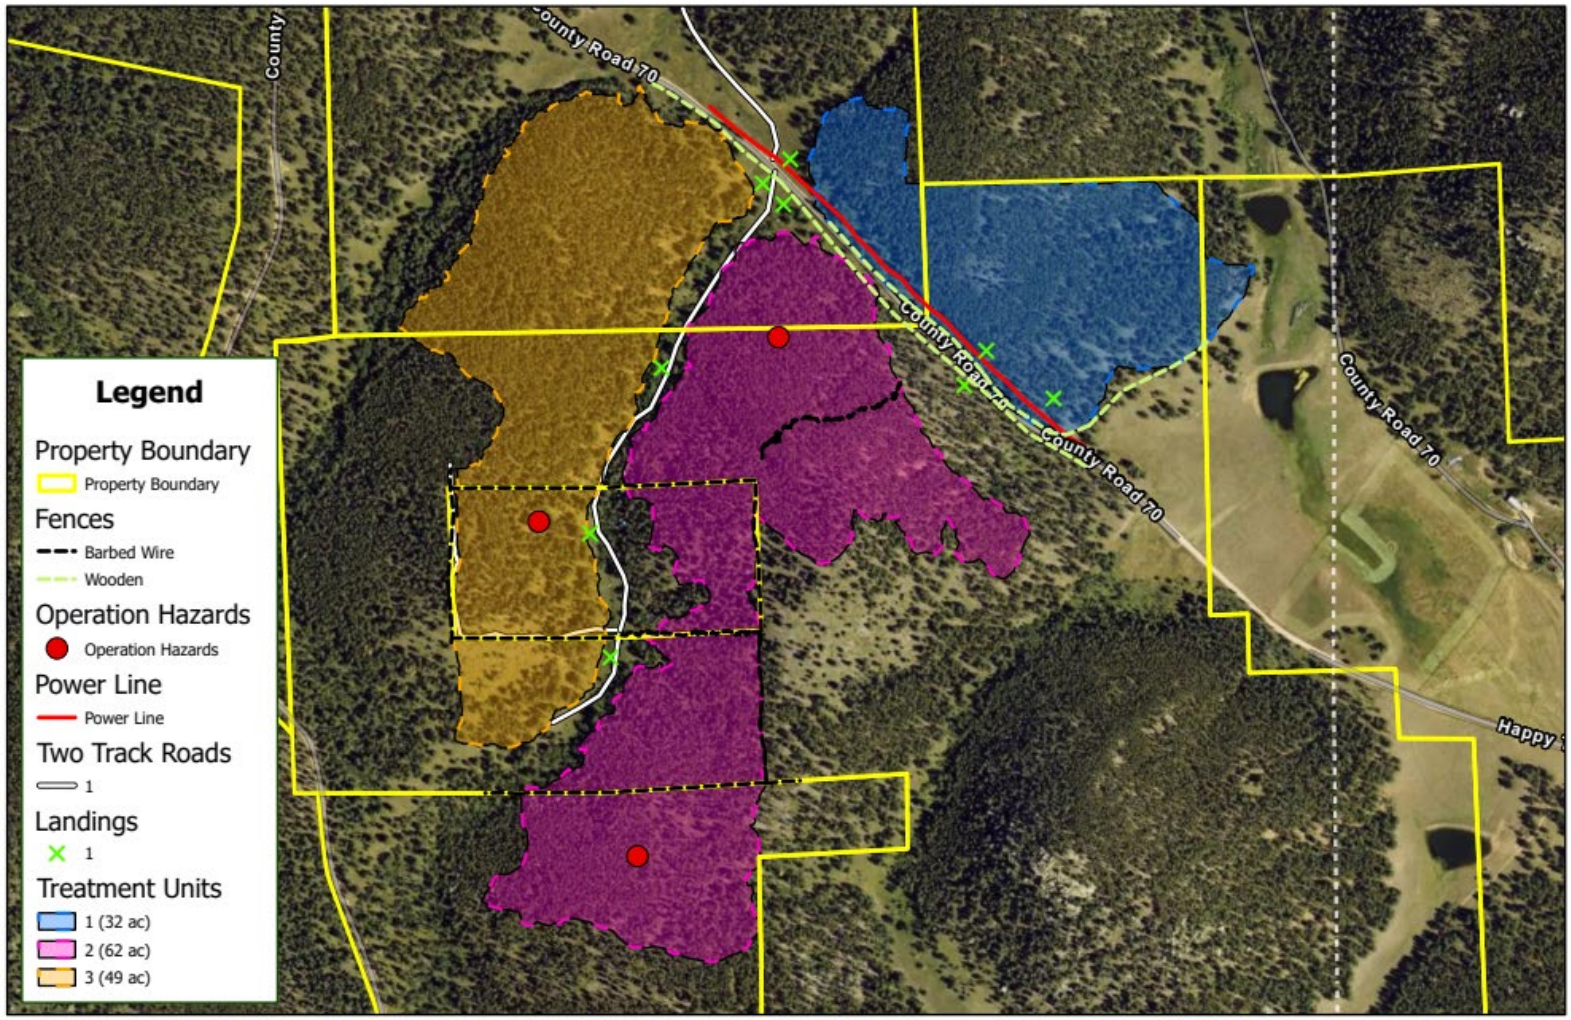

N


0 250 500 750 1,000 Feet

1:8,000


Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:22 AM

COLORADO STATE FOREST SERVICE

Castle View - Echo Valley Ranch - Locator Map

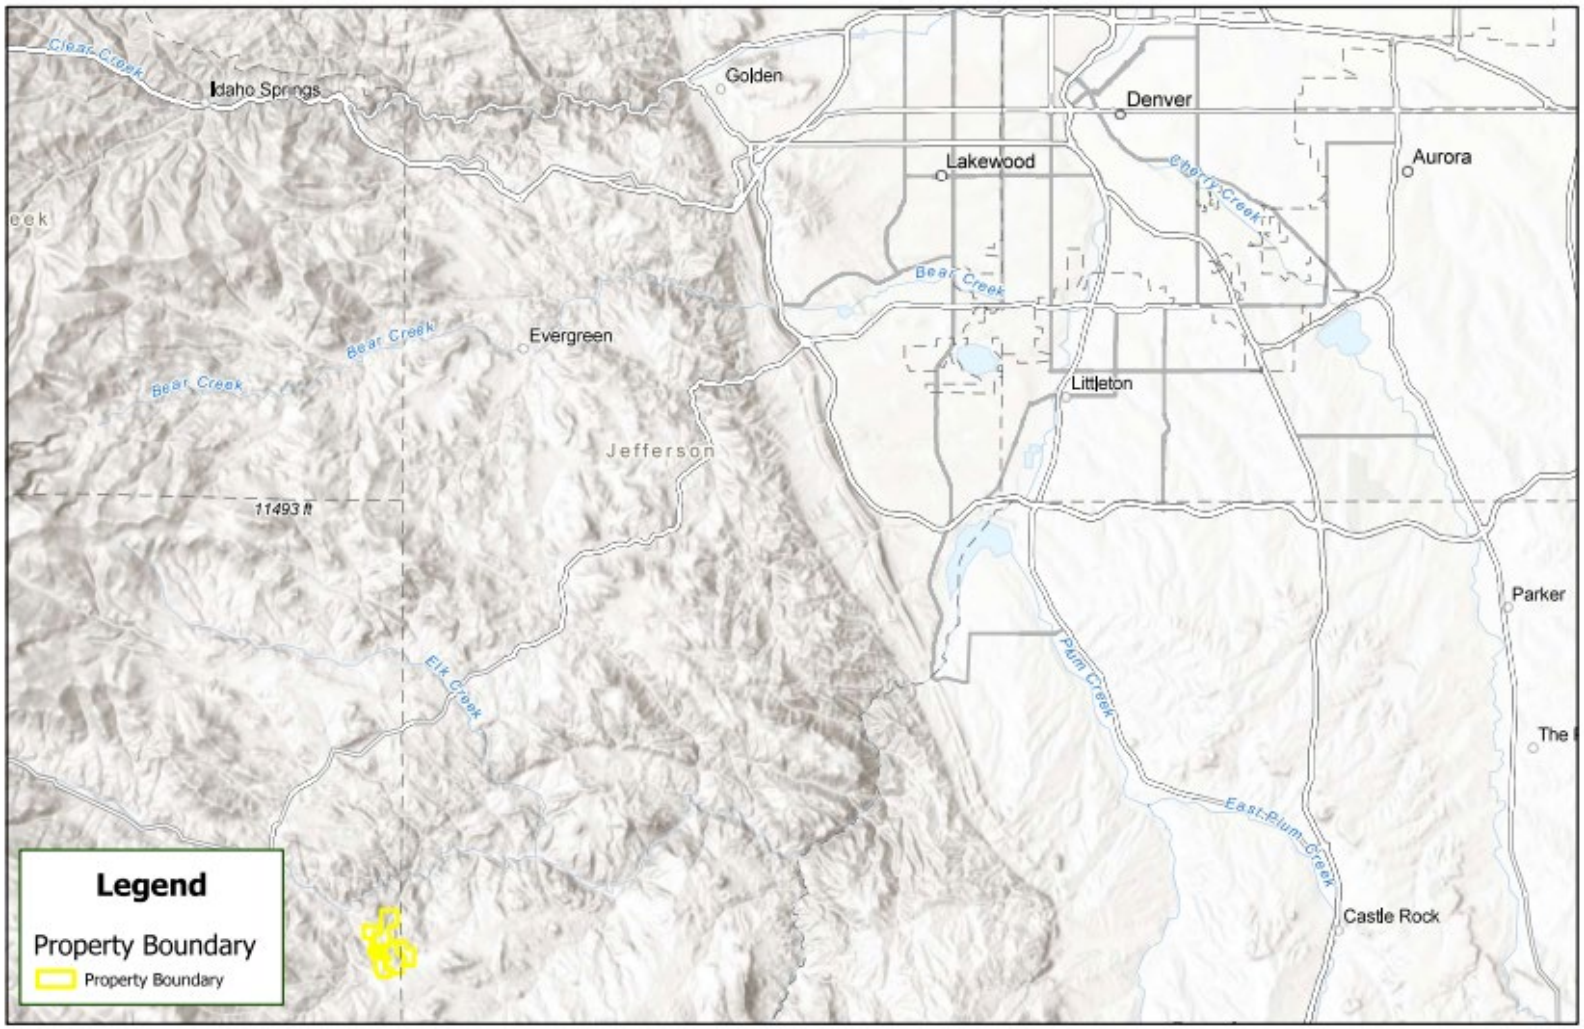

Castle View - Echo Valley Ranch - Inoperable Areas

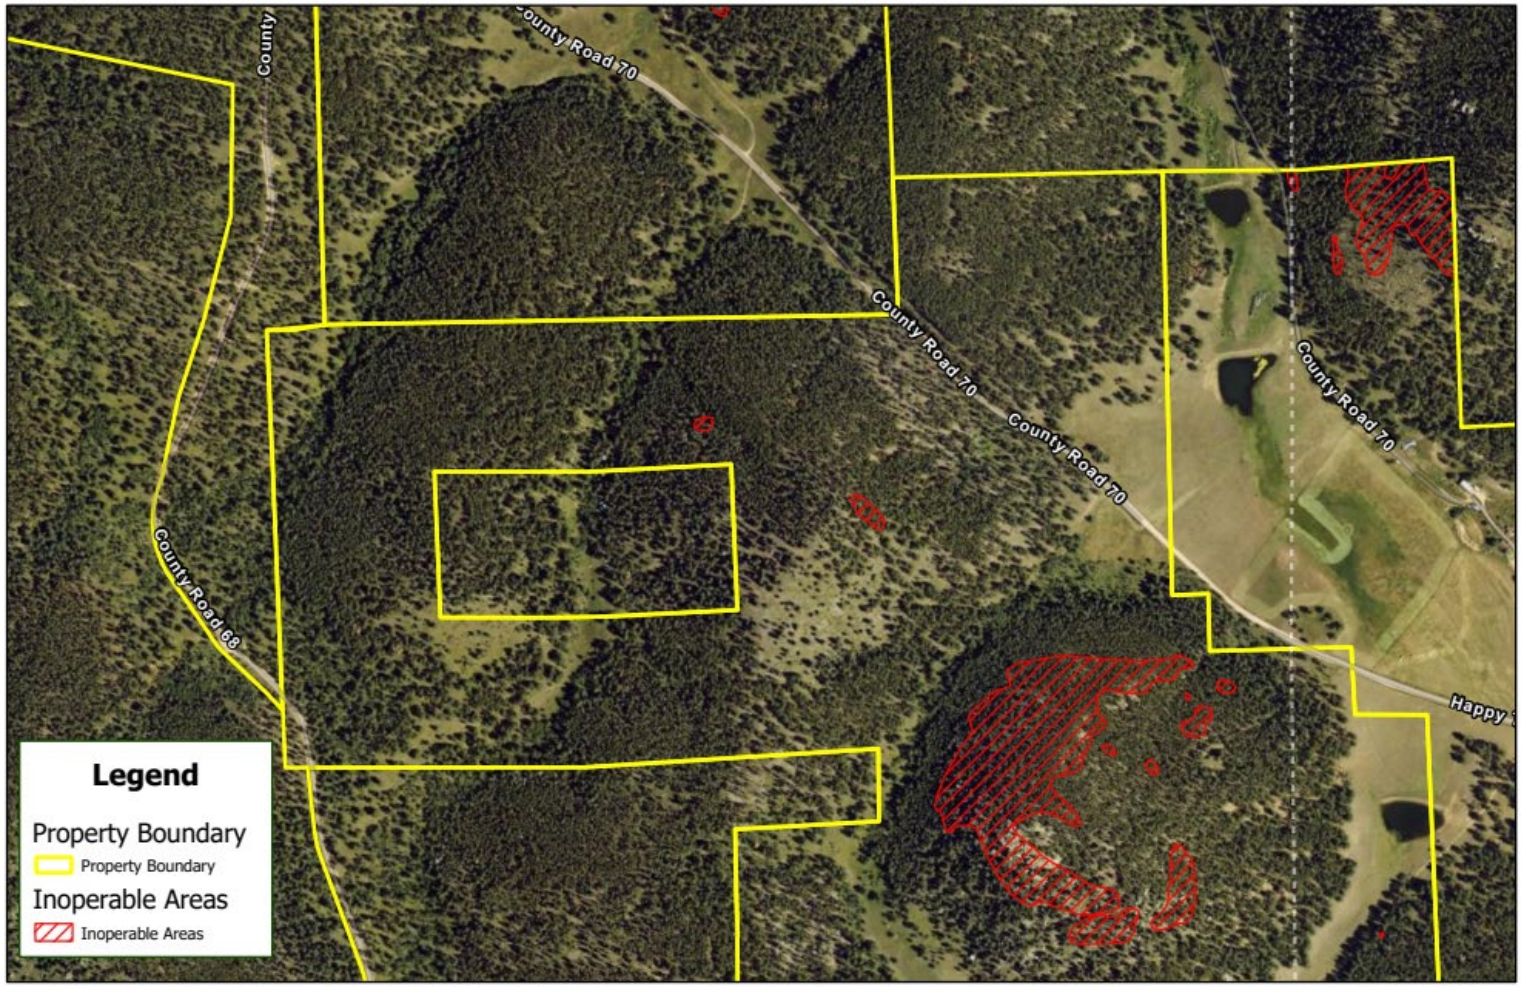

N


0 250 500 750 1,000 Feet

1:8,000

Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:44 AM

COLORADO STATE FOREST SERVICE

Castle View - Echo Valley Ranch - Aerial

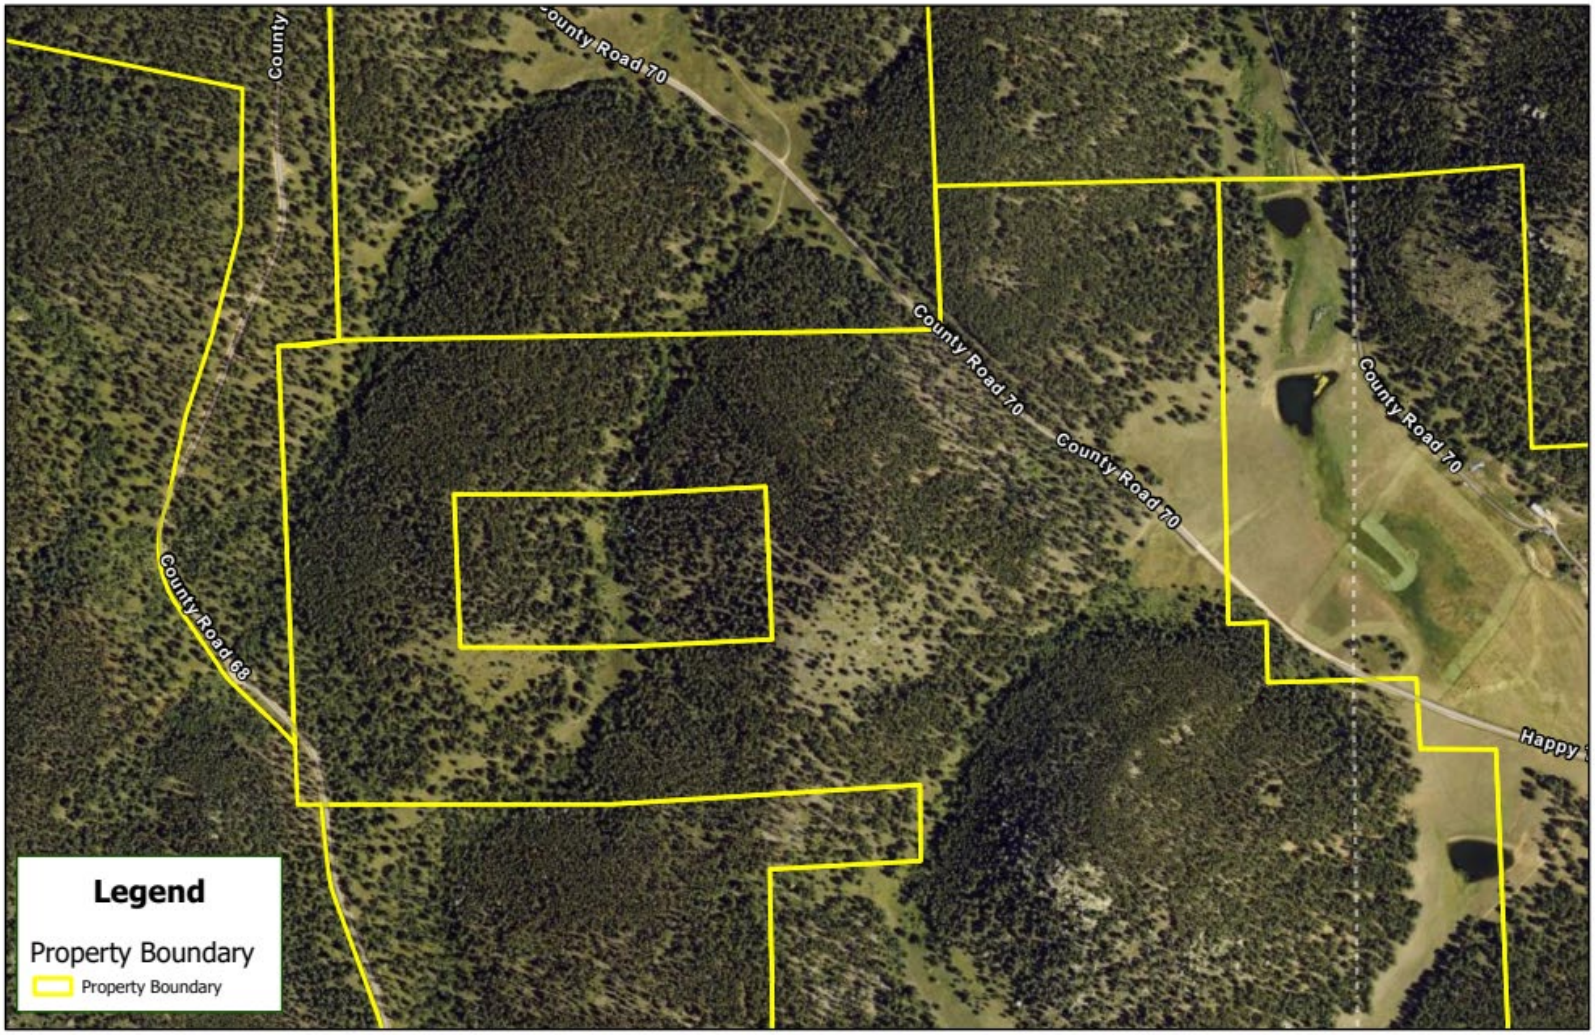

N


0 250 500 750 1,000 Feet

1:8,000

Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:47 AM

COLORADO STATE FOREST SERVICE

Castle View - Echo Valley Ranch - Aerial with Contour

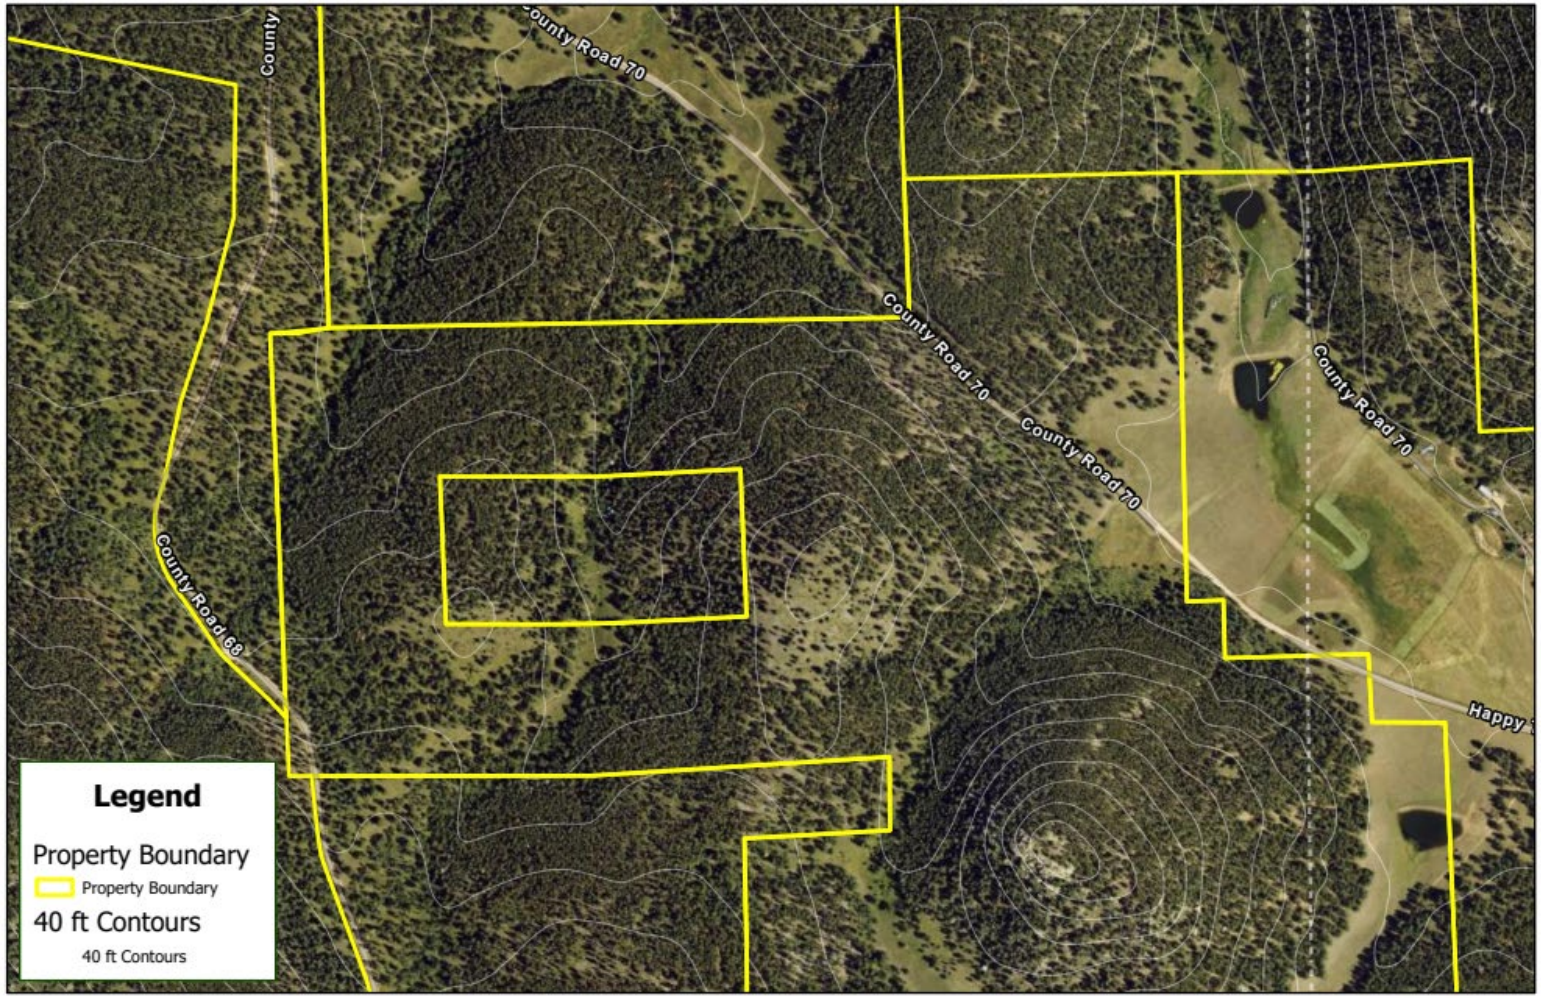

N

0 250 500 750 1,000 Feet

1:8,000

Datum: North American 1983
Projection: Transverse Mercator
Date Exported: 11/10/2025 10:51 AM

COLORADO STATE FOREST SERVICE