Vaulted Deep Isometric Standard Project Verification Report

Client	Isometric
Company / GHG Removal Supplier	Vaulted Deep
Facility or Project Name	TIRE Project
Facility Address	Terminal Island Water Reclamation Plant 445 Ferry St, San Pedro, CA 90731, United States 33.74483551937585, -118.260957070688
Greenhouse Gas Statement ID	ggs_1KYHCQKFF1S0X29E
Net Greenhouse Gas Removals	2347.33 tons CO2e
Removal Method	Biomass Geological Storage
Removal Period	February 21, 2026 – July 10, 2026
Verification Opinion	Meets the requirements with Isometric-Approved Exemptions or Deviations
Verifier/Validation and Verification Body	Kelly Inder-Nesbitt Zoe Sandwith 350Solutions, Inc.

350 SOLUTIONS

Contents

List of Tables 3
List of Figures 3
Acronym and Chemical Definitions 3
1. Verification Summary 4
2. Verification Details 6
2.1. Objectives 6
2.2. Responsibilities 6
2.3. Level of Assurance & Materiality 6
2.4. Validation and Verification Body details 6
2.5. Approach 6
3. Technical Description 7
3.1. Process Overview 7
3.2. Protocols and Modules Applied 8
3.3. Project Boundary 9
3.4. Changes since Previous Verification 9
4. Crediting Details 10
4.1. Reporting Period 10
4.2. Crediting Period 10
5. Verification Summary 10
5.1. Accuracy of the Statement 10
5.2. Verification Opinion 11
5.3. Summary of Verification Findings 12
5.5. Critical Findings and Exemptions 13
5.6. Forward Action Requests (FAR) 14
5.6A. Updates to Prior FARs 14
5.6B. FARs Issued during this Reporting Period 15
6. Revision History 16
7. References 16
Appendix 1: Log of Findings 17
Appendix 2: Files Reviewed 19
Appendix 3: Verifier Qualifications 20
Appendix 4: Verifier Qualifications 22

List of Tables

Table 1. Verification Summary 4
Table 2: Verified Total Removals 5
Table 3:Verification Activities 6
Table 4. GHG Sources, Sinks, and Reservoirs 9
Table 5:Net CDR Calculation for the Reporting Period 11
Table 6:Eligibility criteria for Isometric's Standard, protocol, and modules relevant to TIRE 12
Table 7: Prior Reporting Period FARs 14

List of Figures

Figure 1:Vaulted Deep's process at the TIRE Facility 7

Acronym and Chemical Definitions

ANAB	ANSI National Accreditation Board
AWMS	Advantek Waste Management Services
BICRS	Bio-Intermediary Carbon Removal and Storage
CEQA	California Environmental Quality Act
CDR	Carbon Dioxide Removal
CO_2	Carbon Dioxide
CO_2e	Carbon Dioxide Equivalent
DAS	Distributed Acoustic Sensing
EPA	United States Environmental Protection Agency
FAR	Forward Action Request
GHG	Greenhouse Gas
HPE	High Pressure Effluent
ISO	International Organization for Standardization
LCA	Life Cycle Assessment
MASIP	Maximum Allowable Surface Injection Pressure
MRV	Monitoring, Reporting, and Verification
PDD	Project Design Document
SSR	Sources, Sinks, and Reservoirs
UIC	Underground Injection Control
VVB	Validation and Verification Body
WRTP	Water Reclamation Treatment Plant

ISOMETRIC STANDARD VERIFICATION REPORT		
Company: Vaulted Deep	Company Contact: Jose Ubillus* Haley Leslie-Bole	VVB: 350 Solutions Kelly Inder-Nesbitt* Zoe Sandwith
Removal Method: BICRS		
Report Date: August 28, 2026		
Document No: 350-IS.VAU.TI.01		
Revision: v1.1		

**primary contact/lead author*

1. Verification Summary

Table 1. Verification Summary

Project Proponent	
Other Project Participants	NA
Project Name	TIRE Project
Isometric Project Code	B9B1
Removal Method	BICRS
Legal Ownership of CDR	Vaulted Deep
Crediting Period	January 3, 2026 – January 2031
Reporting Period	February 21 – July 10, 2026
Greenhouse Gas Statement ID	ggs_1KYHCQKFF1S0X29E
Report Date	August 28, 2026
Net Carbon Dioxide Removal	2347.33
Project Location	445 Ferry St, San Pedro, CA 90731, United States 33.74483551937585, -118.260957070688
Audit Type	Isometric Standard Verification in accordance with the following standard, protocol, and modules: Isometric Standard v1.1 Biomass Geological Storage Protocol v1.1 Embodied Emissions Accounting v1.0 Energy Use Accounting v1.2 Transportation Emissions Accounting v1.1 Biomass Feedstock Accounting v1.2 Biomass Storage in Permeable Reservoirs v1.0

350Solutions was contracted to perform a verification of the greenhouse gas (GHG) statement submitted by Vaulted Deep for the TIRE Project covering the reporting period February 21 – July 10, 2026. The TIRE Project is a biomass injection carbon removal project located at the Terminal Island Water Reclamation Plant in San Pedro, California, USA. The project achieves carbon dioxide removal through the injection and long-term geologic storage of eligible municipal biosolids within a deep permeable reservoir system. The project was previously validated by 350Solutions on June 17, 2026 and remains eligible for crediting during the approved crediting period January 3, 2026 – January 2031. The validation report can be found on the Isometric Registry (https://registry.isometric.com/project/prj_1K7HK8Q4S1S0D4W4).

This verification assessed the reported carbon removals, project emissions, monitoring records, feedstock accounting, storage monitoring data, and supporting documentation associated with the reporting period. Verification activities included review of project monitoring records, GHG accounting calculations, laboratory analyses, operational data, regulatory compliance documentation, and supporting evidence provided by Vaulted Deep. Verification activities were undertaken in accordance with the applicable Isometric Standard, Biomass Geological Storage Protocol, and associated Modules.

The TIRE Project operates within an existing biosolids injection facility and generates carbon removal through the diversion of additional eligible biosolids from counterfactual disposal pathways and their emplacement within a deep geologic storage complex. Carbon removals are quantified through measurement of eligible injected biomass, application of project-specific carbon content analyses, accounting for baseline and counterfactual storage, and deduction of project-related emissions.

350Solutions affirms that Vaulted Deep has quantified greenhouse gas removals using appropriate equipment, procedures, monitoring systems, and protocols for the permanent geological storage of biomass in accordance with the requirements of the applicable Isometric standards, protocols, and modules.

The total net carbon dioxide removals reported by Vaulted Deep for the reporting period were 2,347.33 net removals tCO_2e. The carbon removals for the reporting period are provided in Table 2. These values have been verified by 350Solutions and the verification conclusions are presented throughout this report.

Table 2: Verified Total Removals

Isometric Removal ID	Sequestration Start Date	Sequestration End Date	Net tonnes CO_2e removed
ggs_1KYHCQKFF1S0X29E	February 21, 2026	July 10, 2026	2,347.33

The quantity of 2,347.33 tonnes of net carbon removals has been verified with a reasonable level of assurance and are eligible for crediting under the referenced Isometric Standard and Protocol.

Verifier Information		
Verification Body	**Verifier**	**Verification ID No.**
350Solutions, Inc.	Kelly Inder-Nesbitt	350-IS.VAU.TI.01

Kelly Inder-Nesbitt

Digitally signed by Kelly Inder-Nesbitt
Date: 2026.09.01 20:28:37 +02'00'

Signed: Kelly Inder-Nesbitt (Verifier)

Zoe Sandwith

Digitally signed by Zoe Sandwith
Date: 2026.09.01 11:31:39 -07'00'

Zoe Sandwith(Quality Assurance)

2. Verification Details

2.1. Objectives

A planned series of verification activities (Table 3) was conducted by 350Solutions to reach a conclusion about the accuracy of the GHG statement and compliance with the criteria listed in Section 3.2 of this document.

2.2. Responsibilities

The project proponent, Vaulted Deep, is responsible for the fair presentation of the GHG Statement in accordance with Isometric criteria.

It is the responsibility of 350Solutions to express an opinion as to whether the GHG Statement and supporting documents support verification under the relevant Isometric standard, protocol, and modules.

2.3. Level of Assurance & Materiality

The verification was completed with a reasonable level of assurance. The materiality threshold of 5%, considering the totality of all omissions, errors, and misstatements, was applied to this audit.

2.4. Validation and Verification Body details

350Solutions Inc. declares that we are an impartial verifying body, free from any conflicts of interest, capable, and qualified to complete this verification for the current operational period according to the Isometric Standard V1.1 and applicable protocols and modules utilizing a reasonable level of assurance.

350Solutions is an accredited inspection & verification body by ANAB under ISO 17020 for completion of ISO 14034 Technology Verifications. 350Solutions is based out of Raleigh, North Carolina, USA. This verification was led by Kelly Inder-Nesbitt, Senior Carbon Removal Verification Engineer. Quality assurance was provided by Zoe Sandwith. Complete verifier qualifications are included in Appendix 3.

2.5. Approach

The verification process activities are described in Table 3. Appendix 1 contains the list of findings identified throughout the verification process. The list of files that were reviewed are listed in Appendix 2.

Table 3:Verification Activities

Date(s)	Activity	Tasks
August 3, 2026	Review of reporting period modifications to PDD	- Review of GHG statement - Review of Baseline adjustment
August, 21, 2026	Review of current validation and GHG statement applicability;	- Review of Validation Report - Review of prior Verification Report - Identification of major and minor process steps, measurements, and calculations

	Verification of Removals	- Review of Standards / Protocols/ Modules required for Verification - Generation of a checklist of verification issues, recommendations, and opportunities for improvement - Verify changes to the system - Review of measurements and calculations - Review of durability/permit requirement monitoring data - Review of GHG statement
August 26, 2026	Write Report	- Revised template update and inclusion of findings and recommendations
August 27, 2026	Quality assurance and revisions	- Review of findings, recommendations and CO2e net removals figures

3. Technical Description

3.1. Process Overview

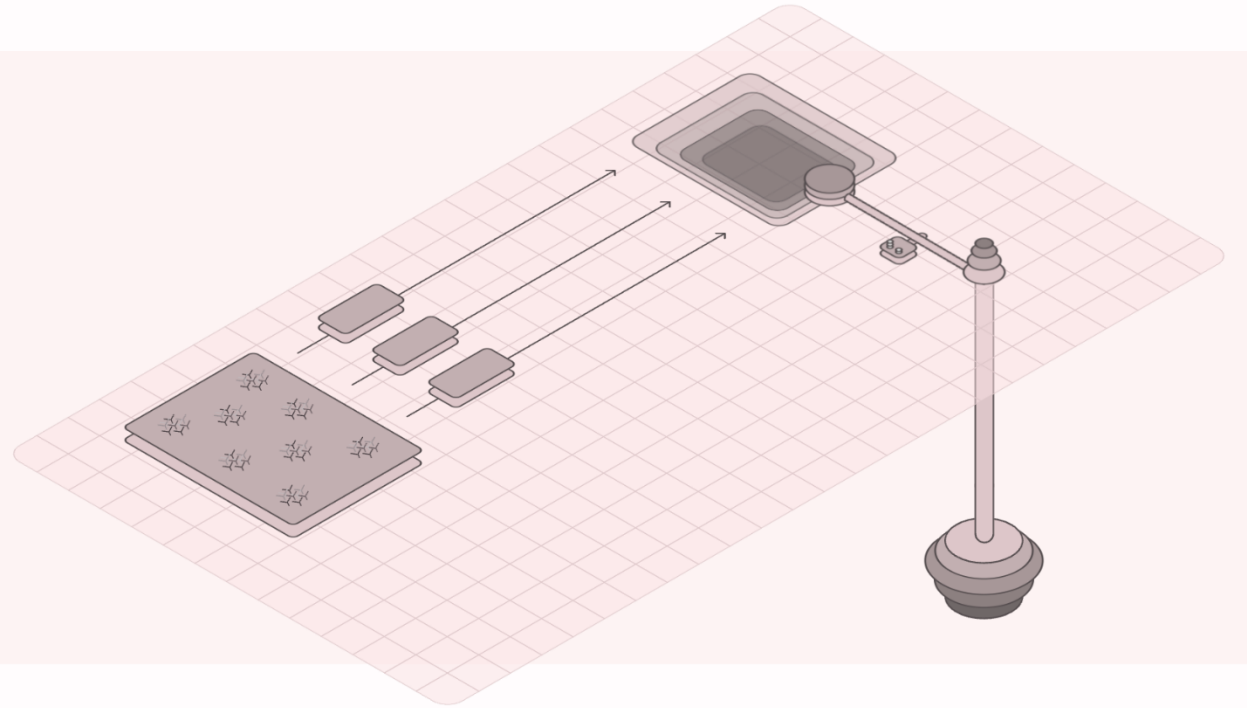


Figure 1:Vaulted Deep's process at the TIRE Facility

The Vaulted Deep TIRE Project utilizes a biomass geological storage pathway whereby eligible organic waste materials are permanently stored through injection into a deep permeable geologic formation. The project is located within the Terminal Island Water Reclamation Plant (TIWRP) in San Pedro, California and operates under a United States Environmental Protection Agency (EPA) Underground Injection Control (UIC) permit. Carbon dioxide removal is generated through the diversion of additional eligible biosolids from counterfactual disposal pathways and their

subsequent injection into a subsurface storage complex intended to provide long-duration carbon storage.

The project leverages an existing biosolids injection facility with a long operational history. Carbon removals are only attributed to biosolids volumes that exceed the established historical baseline and meet the applicability requirements of the Isometric Biomass Geological Storage Protocol and associated modules. The carbon removal activity is therefore integrated within an existing waste management operation, with project eligibility dependent upon demonstrating additionality through acceptance of incremental feedstock volumes supported by carbon finance.

Eligible feedstocks primarily consist of municipal biosolids generated by wastewater treatment operations in the Los Angeles region. Biosolids are received from the co-located Terminal Island Water Reclamation Plant and external wastewater treatment facilities. Incoming feedstock quantities are determined using calibrated third-party weighbridge systems operated by suppliers and documented through weigh tickets and supporting records integrated into the project's data management platform. Feedstock streams that do not meet protocol applicability requirements, including emergency deliveries and other excluded material classes, are tracked separately and excluded from carbon removal calculations.

Following receipt, biosolids undergo limited processing prior to injection. Wetcake biosolids are blended with available liquids, including digested sludge, high-pressure effluent (HPE), and brine, to create a pumpable slurry suitable for subsurface injection. Screening equipment is used to remove foreign material and protect downstream equipment. No thermal, chemical, or biological conversion of the biomass is undertaken as part of project operations, such that the carbon content of the injectate remains representative of the incoming feedstock.

Prepared slurry is injected through permitted deep injection wells into a sequence of geologic formations located approximately 3,800 to 7,500 feet below ground surface. The facility currently operates two active injection wells and two monitoring wells. Injection activities are conducted within permit-defined operating limits, including restrictions on injection pressure and rate. Surface pressure, injection rates, cumulative injected volumes, annulus pressure, and subsurface formation conditions are monitored continuously using automated instrumentation and control systems. Automatic shutdown procedures are implemented where operational thresholds are exceeded.

Storage integrity is supported through a combination of operational monitoring, well integrity monitoring, pressure and temperature measurements, periodic reservoir testing, gas detection systems, and regulatory reporting requirements. Monitoring information is integrated into Vaulted Deep's internal data management platform ("Data Vault"), which consolidates operational, laboratory, monitoring, and accounting information used in the quantification and reporting of carbon removals. Data collected through these systems forms the basis of the project's Monitoring, Reporting, and Verification (MRV) framework and supports preparation of the periodic GHG Statements submitted for verification.

3.2. Protocols and Modules Applied

The validation and verification were conducted following the specifications of the following standards, protocols, and modules:

- Isometric Standard V1.1
- Biomass Geological Storage Protocol v1.1

- Embodied Emissions Accounting v1.0
- Energy Use Accounting v1.2
- Transportation Emissions Accounting v1.1
- Biomass Feedstock Accounting v1.2
- Biomass Storage in Permeable Reservoirs v1.0

3.3. Project Boundary

The greenhouse gas sources, sinks, and reservoirs within the system boundary for TIRE are listed in Table 4.

Table 4. GHG Sources, Sinks, and Reservoirs

Activity	SSR	Quantification Method
Project Establishment & Operations	Delivery of biosolids to the injection facility	Calculated from measured transport fuel consumption or transport distance and applicable emission factors.
	Injection facility operations (slurry preparation, pumping and injection)	Calculated from metered electricity consumption and applicable grid emission factors.
	High Pressure Effluent (HPE) pumping	Included within facility electricity consumption for injection operations.
	Equipment use and maintenance	Calculated from measured fuel consumption and maintenance-related consumables, where applicable.
	Foreign material transport and handling	Calculated from transported mass, transport distance and applicable emission factors.
	Monitoring, sampling and laboratory analysis	Calculated from project activity data, laboratory sampling activities and associated transport emissions.
Sinks / Storage	CO_2 stored in the geologic formation	Calculated from measured injected biosolids mass and laboratory-determined carbon content, converted to CO_2e using the Isometric methodology.
Counterfactual / Leakage	Counterfactual carbon storage	Calculated using the approved Isometric counterfactual storage model based on feedstock characteristics and baseline disposal scenarios.
	Market leakage	Assessed through feedstock eligibility requirements; no market leakage identified for eligible biosolids feedstocks.
End-of-Life	End-of-life emissions (equipment and infrastructure)	Included as embodied emissions and allocated over the project lifetime.

3.4. Changes since Previous Verification

Since the previous verification, the project baseline was updated in accordance with the approved baseline methodology using historical injection volume data through December 2025, resulting in a revised baseline of 933.79 US tons/week. In addition, a one-time adjustment was applied to address a conservatively low cushion used during the first verification period. Consequently, the first seven weeks of the current reporting period were assessed using a baseline of 948.79 US

tons/week, with the remaining weeks assessed using 933.79 US tons/week. The application of the revised baseline and cushion adjustment increased the quantity of waste treated as baseline and correspondingly reduced the quantity of waste eligible for crediting during the reporting period. Following application of the updated baseline approach, 18,780.8 US tons of waste were assigned to the baseline condition, and 8,933.361 US tons of waste were determined to be creditable.

4. Crediting Details

4.1. Reporting Period

This is the second reporting period for this project, spanning February 21, 2026 – July 10, 2026.

4.2. Crediting Period

This project was initially validated on June 17, 2026, with a crediting period of January 3, 2026 to January 3, 2031.

5. Verification Summary

5.1. Accuracy of the Statement

The values represented in the GHG statement have been evaluated, cross-referenced with the presented evidence, and confirmed. Confirmation of the GHG statement has been based on the following efforts:

Recalculation of removals, including:

- Duplication of calculations of creditable biomass quantities, baseline deductions, counterfactual deductions, and net CO_2e removals reported in the GHG Statement.
- Review of biomass receipt, handling, and emplacement records, including weigh tickets, operational logs, injection records, flowmeter data, and supporting inventory documentation.
- Verification of baseline and counterfactual calculations against supporting records and protocol requirements.

1. Review of monitoring data to check for large disturbances or regulatory exceedances, including review of operational monitoring records, injection system performance data, well monitoring information, permit compliance documentation, and environmental monitoring records.
2. Review of supporting data for operational emissions during the reporting period, including transportation emissions, electricity consumption, propane consumption, foreign material transportation, pump maintenance activities, laboratory sampling activities, and other applicable emissions sources included within the project boundary.
3. Review of analytical data quality, methods, and uncertainty analysis, including sampling methodologies, analytical results, carbon content determinations, data completeness, and application of uncertainty deductions where required.

4. Review of feedstock characterization and eligibility, including confirmation of feedstock type, waste classification, sourcing records, and consistency with the requirements of the Biomass Feedstock Accounting Module.
5. Review of environmental and social safeguarding practices, including review of applicable permits, regulatory authorizations, environmental compliance records, and evidence relevant to the environmental and social requirements of the Isometric Standard.

Issues identified during the verification process are listed in Appendix 1.

Each term in the net CDR calculation was recalculated where possible, or the approach or justification reviewed, where direct recalculation was not possible. The terms and corresponding values for this reporting period are listed in Table 5.

Table 5:Net CDR Calculation for the Reporting Period

Parameter	Value (tonnes CO_2e)*	Source
CO_2eRemoval, RP	**2,347.33**	GHG Statement Report — net CO_2e removed
CO_2eStored, RP	**2,477.89**	GHG Statement calculations based on 8,933.361 US tons of creditable waste and applicable carbon content
CO_2eEmissions, RP	**130.56**	Sum of operational and counterfactual emissions reported in the GHG Statement
CO_2eEstablishment, RP	**0.00**	Embedded/embodied carbon reported as zero
CO_2eOperation, RP	**105.88**	Energy, HPE receipt, feedstock and foreign-material transport, propane, laboratory sampling and pump maintenance
CO_2eEnd-of-Life, RP	**0.00**	No end-of-life emissions reported for the reporting period
CO_2eLeakage, RP	**24.68**	Counterfactual emissions using the 2.92% retained-carbon assumption
Uncertainty Discount	**0.00**	Project sensitivity analysis determined that uncertainty in the assessed input parameters did not result in a material change to net removals; therefore no separate uncertainty deduction was applied.

* Values have been rounded and may not add up without error.

5.2. Verification Opinion

350Solutions has reviewed the documentation of the technology, the instrumentation, the procedures, and performance and has found that the data presented in the GHG Statement and its supporting documents:

☐ ***Meets the requirements of the Isometric Standard v1.1 and Biomass Geological Storage Protocol for Verification***

☒ ***Meets the requirements with Isometric-Approved Exemptions or Deviations from the Isometric Standard v1.1 and Biomass Geological Storage Protocol for Verification***

☐ ***Meets the requirements of the Isometric Standard v1.1 and Biomass Geological Storage Protocol for Verification with minor modifications***

☐ ***Does Not Meet the requirements of the Isometric Standard v1.1 and Biomass Geological Storage Protocol for Verification***

By adhering to the requirements of the Isometric standard, protocols and modules, removals of 2,347.33 tonnes CO2e from Vaulted's TIRE Project have been verified in accordance with the validated PDD and the criteria listed in Section 3.2 with a reasonable level of assurance.

5.3. Summary of Verification Findings

Table 6 contains a summary of findings for each section of the Isometric Standard and any additional requirements imposed by the relevant protocol and module(s).

Table 6:Eligibility criteria for Isometric's Standard, protocol, and modules relevant to TIRE

Reference	Criteria	Finding
	Isometric Standard v1.0	
3.7 / 3.8	Stakeholder Engagement & Grievance Mechanism	**Acceptable with Isometric Exemption (Appendix 4)** – Isometric granted an exemption from the pre-project stakeholder engagement timing requirement based on the long operating history of the Terminal Island facility, existing regulatory oversight, prior engagement activities by previous operators, and Vaulted's forward stakeholder engagement plan and active grievance mechanism. No material change in community impacts relative to baseline operations was identified.
2.5.2	Baseline	**Acceptable** – The Project establishes a baseline using historical biosolids injection volumes at TIRE, excluding emergency and Class B volumes. During the reporting period, the baseline was updated in accordance with the approved methodology, resulting in a more conservative baseline allocation and a reduction in the quantity of waste eligible for crediting.
2.5.3	Additionality	**Acceptable** – Historical TIRE operations were funded through City of Los Angeles tipping fees. Additional feedstock volumes are obtained through waiver of tipping fees above the baseline threshold, with carbon finance providing the revenue necessary to support incremental biosolids acceptance and storage activities.
2.5.4	Leakage	**Acceptable** – The Project identified nutrient replacement and market leakage as the primary potential leakage pathways associated with diversion of biosolids from a Farm. Supplementary documentation demonstrated compliance with EC1 and concluded any potential market leakage remains below Isometric materiality thresholds.
2.5.1 / 2.5.5	System Boundary & GHG Statement	**Acceptable** – The Project boundary includes feedstock transport, preprocessing, injection, monitoring, decommissioning and well plugging activities, together with project emissions, counterfactual emissions and counterfactual storage calculations.
2.5.7	Uncertainty	**Acceptable** – Carbon content is determined using project-specific laboratory testing and Isometric-approved sampling methodologies. Conservative assumptions are applied where direct measurement is not feasible.
	Biomass Geological v1.1	
6.3	Ownership	**Acceptable** – Ownership of environmental attributes and carbon credit rights is established through agreements between GeoEnvironment, AWMS, Vaulted Deep and the City of Los Angeles. The contractual framework reviewed provides clear ownership of removals generated by the Project.

6.4	Additionality	**Acceptable** – The Project demonstrated that additional biosolids volumes are enabled through waived tipping fees and carbon finance. Deep geologic injection of biosolids for carbon removal is not considered common practice within the United States.
7.2	Counterfactual Baseline	**Acceptable** – The Project identifies land application at Green Acres Farm as the most likely counterfactual fate of additional biosolids. Counterfactual emissions and storage are quantified using a two-pool biosolids decay model.
7.3	Net CO_2e Removal Calculation	**Acceptable** – Net removals are calculated using measured feedstock carbon content, project emissions, counterfactual emissions and counterfactual storage. Project accounting includes transportation, operational energy use, maintenance and end-of-life emissions.
7.3.5.6	Leakage	**Acceptable** – Leakage was assessed through feedstock eligibility screening and a project-specific market leakage analysis. The assessment concluded that diversion of biosolids from Green Acres Farm does not create material market leakage.
Biomass Storage in Permeable Reservoirs Module v1.0		
3.3	Physical Characterization	**Acceptable** – The Project provided reservoir characterization information supporting the suitability of the storage formation for long-term biosolids emplacement. The TIRE facility has an established operational history of biosolids injection. During the reporting period a microseismic assessment was undertaken, no anomalies were noted.
3.4	Geochemical Characterization	**Acceptable** – Available geologic and geochemical information supports long-term storage of injected biomass within the target formation and is consistent with the permanence objectives of the Project. During the reporting period a quarterly report was submitted to the EPA, no anomalies were noted.
4.1	Injection and Monitoring	**Acceptable** – Operational monitoring procedures are in place for feedstock receipt, injection activities and storage accounting. Monitoring requirements are consistent with the Project monitoring plan and protocol requirements. The Projects environmental permits and licenses are all current and no non-compliance was observed with local legislation.
4.5	Closure and Post-Closure	**Acceptable** – Decommissioning and well-plugging activities are included within the Project boundary and associated emissions are incorporated into the project accounting framework.
OVERALL ELIGIBILITY		ELIGIBLE
Eligible Period		January 3, 2026 – January 3, 2031

5.5. Critical Findings and Exemptions

None identified for this reporting period.

5.6. Forward Action Requests (FAR)

5.6A. Updates to Prior FARs

Table 7: Prior Reporting Period FARs

ID No	Date Issued	Finding / Issue	Audit Evidence	Protocol Reference	Required Action	Status
ISS – 79 , 81	April 20, 2026	Stakeholder engagement activities have not yet been implemented due to the pending acquisition of the TIRE facility. Isometric granted an exemption from the pre-project stakeholder engagement timing requirement based on existing facility engagement records, regulatory oversight, and Vaulted's forward engagement plan.	Stakeholder Engagement Exemption Note (April 2026), Stakeholder Engagement Plan, Grievance Mechanism Documentation	Isometric Standard v1.0 §3.7, §3.8	Following acquisition of the TIRE facility, implement the stakeholder engagement plan, including stakeholder outreach, grievance tracking, and maintenance of a stakeholder engagement log. Evidence of implementation shall be reviewed at first verification.	Open
ISS - 106	April 28, 2026	Historical propane purchase records are currently used as a proxy for estimating propane consumption within the LCA.	ISS-106 Log of Issues, TIRE LCA Workbook, Supporting Propane Consumption Documentation	Isometric Standard v1.0 §2.5.5	Replace historical propane consumption estimates with contemporaneous propane purchase and consumption records during the verification period and update emissions calculations accordingly.	Resolved
ISS 127	April 21, 2026	Historical lubricant purchase records are currently used as a proxy for estimating lubricant consumption associated with facility maintenance activities.	ISS-88 Log of Issues, TIRE LCA Workbook, Maintenance and Consumables Documentation	Isometric Standard v1.0 §2.5.5	Replace historical lubricant consumption estimates with contemporaneous lubricant purchase and usage records during the verification period and update emissions calculations accordingly.	Resolved
ISS 112 / 130	April 21, 2026	Documentation supporting the long-term ownership arrangement for environmental attributes and removals was undergoing revision and had not been fully executed at the time of verification.	Ownership agreements, Offtake agreement, TIRE Transition agreement	Isometric Standard v1.0 §3.1	Provide finalized and executed ownership documentation for verifier review once the revised arrangements have been completed.	Open

5.6B. FARs Issued during this Reporting Period

None identified for this reporting period.

6. Revision History

Version	Date Issued	Noted Changes
Draft Version 1.0 (v1.0)	August 27, 2026	Initial Version
Draft Version 1.1 (v1.1)	August 28, 2026	Edits based on internal QA review

7. References

[1] Isometric, “Isometric Standard v1.1,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/standard/1.6.2

[2] Isometric, “Biomass Geological Storage Protocol v1.1,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/protocol/biomass-geological-storage/1.1

[3] Isometric, “Embodied Emissions Accounting v1.0,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/protocol/embodied-emissions/1.0

[4] Isometric, “Energy Use Accounting v1.2,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/protocol/energy-use-accounting/1.2

[5] Isometric, “Transportation Emissions Accounting v1.1,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/protocol/transportation/1.1

[6] Isometric, “Biomass Feedstock Accounting v1.2,” Accessed: 1 Dec. 2025. [Online]. Available: https://registry.isometric.com/module/biomass-feedstock-accounting/1.2

[7] Isometric, “Biomass Storage in Permeable Reservoirs v1.0,” Accessed: Dec. 2025. [Online]. Available: https://registry.isometric.com/module/biomass-storage-in-permeable-reservoirs/1.0

Validation and Verification Report for Isometric Vaulted Deep: https://storage.googleapis.com/isometric--production--eu--public-documents/spl_1H43SYY631S0Z8YR/prj_1K7HK8Q4S1S0D4W4/pjd_1KVBSZVB01S0XHP2/validation_and_verification_report.pdf

Appendix 1: Log of Findings

All material clarifications, misstatements, and omissions have been resolved. Clarifications have been removed from this log as they do not represent issues with the documents provided.

Issue No.	Date Issued	Type	Description of Issue	Vaulted Comment	Required Action	Status
ISS 133	Aug 24, 2026	Clarification	EPA report review. I am aware you are injecting into SFI1 and not SFI3 but Vaulted will be taking over ownership and operation of these wells. As such I do have a query based on my review of the EPA report. • does the generated methane remain confined • has any produced gas has been vented, flared, or recovered	The system is closed, where any gases collected for the quarterly gas samples are obtained through a valve at the SFI3 wellhead. No produced gas has been recovered and therefore has not been vented or flared	None	Resolved
ISS 131	Aug 24, 2026	Clarification	LCA, please confirm: • LCA is still the approved amortized project-emissions model and that • No additional embodied emissions require inclusion under the current reporting period	Confirming for both; the model is still being utilized and embodied emissions were only passed in the first verification, and no other emissions are to be addressed during this reporting period	None	Resolved
ISS 127	Aug 24, 2026	FAR	Open FAR Update: Please confirm if you have addressed the LCA historical use of pump lubricant data?	Pump Lubricant Data was updated and reflected amongst the current verification's LCA.	None	Resolved
ISS 128	Aug 24, 2026	FAR	Open FAR Update:	Confirming no new stakeholder engagement has occurred since TIRE was validated	Provide proof of consultation once	Open

			Please confirm no new stakeholder engagement has occurred since validation of TIRE?		ownership is transferred.	
ISS 129	Aug 24, 2026	FAR	Open FAR Update: Please advise: propane purchase records, previously historical purchase data was used, has the LCA been updated yet to reflect revised figures?	Yes; the most recent propane purchase data was used in this verification and updated in the LCA; the records can be found in the TIRE folder under Degreaser & Fuel Records	None	Resolved
ISS 130	Aug 24, 2026	FAR	Open FAR Update: Please upload the latest credit ownership documentation as it will be applicable for this reporting period.	See here for the latest and applicable documentation (7.31.26 Signed Second Amendment to Transition Agreement)	The current ownership amendment will not be admissible for the next reporting period and Vaulted will need to provide a new amendment to remain in compliance with Isometric requirements.	Open

Appendix 2: Files Reviewed

ggs_1KYHCQKFF1S0X29E

gss_1KYJ4QCKS1S0D8Z0

[External] TIRE Buffer Calculation_v2

02-21-26_07-10-26 Isometric GHG Statement Report (3)

[External] TIRE Buffer Calculation_v2

Certificate of Calibration for Unit RM-0010.pdf

Certificate of Calibration for Unit RM-0011.pdf

Certificate of Calibration for Unit RM-0012.pdf

Certificate of Calibration for Unit RM-0013.pdf

20260227_TIRE_Project_Summary.pdf

20260320_TIRE_Project_Summary.pdf

20260327_TIRE_Project_Summary.pdf

20260410_TIRE_Project_Summary .pdf

20260626_TIRE_Project_Summary .pdf

20260717_TIRE_Project_Summary .pdf

20260724_TIRE_Project_Summary.pdf

Continuous Monitoring Data - Q2 2026.xlsx

[Current] UIC Permit No. R9UIC-CA5-FY18-1R (signed).pdf

UIC_Operations_Technical_Guide.docx

UIC Class V Final Permit.pdf

Final ApprovedTIRE_CEQA_Comments.pdf

Q2_2026_TIRE_EPA_Quarterly_Report_April_to_June.pdf

7.31.26 Signed Second Ammendment to Transition Agreement

Appendix 3: Verifier Qualifications

Kelly Inder-Nesbitt

Senior Carbon Removal Verification Engineer, 350Solutions Inc

---

Education:

- Master of Science in Geography, Archaeology, and Environmental Studies, University of the Witwatersrand, 2014
- Bachelor of Science with Honors in Geography, University of the Witwatersrand, 2011
- Bachelor of Arts in Geography and Archaeology, University of the Witwatersrand, 2010

Experience Summary:

At 350Solutions, Kelly specializes in verifying carbon removal projects to ensure compliance with ISO 14034 standards and carbon registry requirements. With over a decade of experience in environmental compliance and carbon management, she brings extensive expertise in operational compliance and MRV framework implementation, enhancing accuracy, transparency and integrity in the voluntary carbon market.

Kelly's career spans multiple sectors, including aquaculture, mining, and carbon removal technology, where she has developed and audited environmental management systems that promote sustainable practices and attract investor finance. At 350Solutions, she leads the validation of diverse carbon removal pathways, including biochar, BECCS, DAC and direct ocean capture and biomass burial. Her responsibilities encompass site audits and rigorous evaluation of MRV systems to ensure scientifically validated project claims.

Previously Kelly led the development of Brilliant Planet's carbon dioxide removal methodology protocol for algal biomass burial and contributed as an author. She was also responsible for developing and implementing an ISO 14001 compliant EHSS Management System for the FirstWave Group, who are aquaculture industry leaders in Southern and Eastern Africa. This system is also aligned with IFC World Bank Best Practices and leveraged software tools to streamline compliance monitoring and enhance ESG reporting for investor and regulatory alignment.

Throughout her career, Kelly has consistently collaborated with project developers, communities, regulators, and clients to enhance the credibility of environmental initiatives through rigorous documentation and alignment with international standards. Her approach emphasizes precise data management and actionable reporting, elevating compliance practices into a strategic, value-adding process that drives sustainable business growth.

Kelly's strong communication skills and commitment to fostering collaboration enable her to manage complex compliance initiatives effectively. Her ability to bridge the gap between technical requirements and stakeholder expectations continues to advance science-driven, impactful solutions in the carbon removal industry.

Zoe Sandwith
Research & Verification Associate, 350Solutions

EDUCATION:

BSc. Combined Biology & Earth Science, University of Victoria, 2011

EXPERIENCE SUMMARY:

Zoe Sandwith is an observational ocean scientist with expertise in ocean chemistry, biogeochemical cycles, oceanographic instrumentation, and field- and lab-based analytical methodologies. Zoe works on verifying carbon dioxide removal (CDR) technologies, with a focus on marine and open systems. Previously, Zoe conducted academic research on topics including dissolved oxygen in dynamic coastal settings and constraining the error associated with different measurement techniques; the use of dissolved oxygen isotopes for understanding net community productivity and potential export efficiency; the analysis of the marine carbonate cycle and ocean acidification; and the development and testing of novel instrumentation. In addition to her research, Zoe has experience managing large, long-term observational research infrastructure at the marine interface.

SELECTED RESEARCH AND PROFESSIONAL EXPERIENCE:

Jun 2025 – Present: Research & Verification Associate, 350Solutions

Verify CDR technologies on behalf of registries and individual clients. Specializes in marine and open system pathways, instrumentation, carbonate system chemistry, and data quality

2021-2024: Scientist, Hakai Institute
Analyzed high-frequency, high resolution oceanographic data from field programs and autonomous platforms and synthesized in a regional context. Focused on dissolved oxygen dynamics, regional hypoxia, ocean acidification, and climatological linkages. Participated in field monitoring programs and developed and trialed low-cost autonomous sensors and sampling platforms.

2011-2020: Manager & Research Assistant III, Woods Hole Oceanographic Institution
Managed daily operations for the Martha's Vineyard Coastal Observatory and spearheaded infrastructure retrofit and upgrades and permitting review. Conducted research on biogeochemical cycles using gas tracers, specializing in dissolved oxygen isotopes and the dissolved oxygen to argon ratio for measuring Net Community Production, and high-quality analysis of the isotopes of the nitrogen cycle and carbonate system. Methodologies included underway continuous sampling, moored systems, novel autonomous samplers, and discrete sampling methods. Operated in open and coastal ocean, estuarine, lacustrine and marsh systems. Managed multiple analytical laboratories.

SELECTED PUBLICATIONS:

- Evans W, Campbell K, Weekes C, […] **Sandwith Z**, and Jackson J. 2025. Variability in Storm season intensity modulates ocean acidification conditions in the northern Strait of Georgia. *Nature Sci Reports 15(4505)*. https://doi.org/10.1038/s41598-025-88241-8
- Nicholson D, Michel APM, […] **Sandwith Z**, Monk S. 2018. Rapid mapping of methane and carbon dioxide in coastal ecosystems using the ChemYak, an autonomous surface vehicle. *Env Sci* Tech. https://doi.org/10.1021/acs.est.8b04190
- Smith WO, Zhang WG, […] **Sandwith Z,** […] McGillicuddy DJ. 2021. A regional, early spring bloom of *Phaeocystis pouchetti* on the New England continental shelf. *JGR Oceans 126(2)*. https://doi.org/10.1029/2020JC016856

Appendix 4: Exemptions

Exemption Note: Vaulted TIRE Validation

April, 2026

As per Section 3.7 and 3.8 of the Isometric Standard (applied via the Biomass Geological Storage Protocol v1.1), suppliers are required to conduct stakeholder engagement prior to the start of project development, with a documented engagement plan, an active grievance mechanism, and evidence of consultation with affected communities. The requirement exists to ensure that affected stakeholders are informed of project activities, can raise concerns through a formal channel, and are consulted iteratively as the project progresses.

An exemption from the pre-project timing element of this requirement is granted to Vaulted (TIRE) based on the following justifications:

- Vaulted provided prior community engagement records associated with the existing Terminal Island injection facility, which has operated for years under the Terminal Island WWTP permit envelope. Project activities under Vaulted are near-identical to baseline operations from a community-impact perspective, so existing facility-level engagement remains substantively relevant.
- The project adheres to the in-force air and water quality permits held by the Terminal Island WWTP. The regulatory consultation pathway represented by those permits has been continuously in force, providing a documented form of stakeholder oversight throughout the project's existence.
- Vaulted has submitted a robust forward stakeholder engagement plan, mirroring the plan already operating at their existing facility. A grievance mechanism is live, and stakeholder office hours are scoped and ready to execute.
- Vaulted has exhausted what it can reasonably do under current project constraints. The TIRE acquisition has not yet closed. Engagement will be conducted as soon as practicable post-acquisition.

Isometric assessed the risk of this decision on the basis of community impact, regulatory oversight, and forward engagement readiness. Risk is minimal because the project does not change baseline community impact at the site, the facility continues to operate under its existing permits, prior engagement records remain materially relevant, and Vaulted's forward plan and live grievance mechanism are sufficient to capture and respond to any community concerns in the interim.